


Advanced Power Strip



PRODUCT DESCRIPTION:

The MaxLite 8-Outlet Advanced Surge Protector Power Strip (APS) saves energy by shutting off any peripheral devices when the main device is turned off. Simply plug the main device into the "Master" outlet and the peripheral devices into the Energy Saver secondary outlets. When the main device is powered off the APS senses the current drop and shuts off all power to the peripheral devices saving energy.

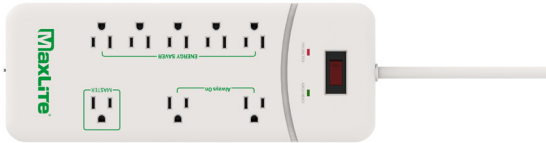

WARRANTY:

1-year standard warranty

(further details available at www.maxlite.com/warranties)

FEATURES:


- Surge protection to 1350 Joules
- 8 Grounded Receptacles
- 8 Total AC Outlets, 3 Transformer outlets for larger plugs
- Product color: White

ORDER STRUCTURE

ORDER CODE	MODEL NUMBER
103714	APS-8/1350J

SPECIFICATION	APS-8/1350J	
	DETAILS	
Input Voltage	120 VAC	
Nominal Input Frequency	60 Hz	
Maximum Output Power	1875W	
Maximum Line Current (amps)	15A	
Circuit Breaker	15A 125V	
Cord Type	ETL/ CETL SJT 14AWG4/3C 140°F	
Housing	PC/ Plastic UL94V-0	
Certification/Standard	ETL Listed	
Operating Temperature	32°F to 104°F	
Environment	Indoor	

DIMENSIONS



DIMENSIONS			
PRODUCT	L	W	H
APS-8/1350J	11.14"	4.17"	1.31"

ENERGY SAVING SURGE PROTECTOR

- 1 primary (master)
- 5 secondary (energy saver)
- 2 constant outlets

How to use your Advanced Power Strip

1. Plug your primary device (ex. television or computer) into the Master (primary) outlet.
2. Plug your peripherals (ex. game system, DVD player, printer, lamp) into the Energy Saver (secondary) outlets.
3. When you turn your primary device (television) on, you will then notice everything plugged into your Energy saver (secondary) outlets turns on.
4. When you turn your primary device (television) off, you will then notice everything plugged into your Energy saver (secondary) outlets turns off.
5. Of course, there may be electronic devices that you want to keep on at all times. If this is the case, simply plug these devices into the constant outlets and they will not be affected and will always remain on.

