

ADJUSTABLE WALL PACK
WALLMAX SERIES



50W & 70W model shown



PRODUCT DESCRIPTION:

Adjustable, installation-friendly LED Adjustable Wall Packs are constructed with pivoting heads that aim light precisely while minimizing glare and backlight. These durable, energy-saving fixtures are perfect for lighting outdoor walkways, landscapes, parking areas and perimeters. Efficacy for the series reaches up to 116 lm/W, translating to 75 percent energy savings over HID luminaires. The fixtures include a variable voltage photocell that provides further energy savings.

FEATURES:

- Fixture head pivots fully up to 90° from mounting plane
- >70 CRI min
- Universal 120-277V power supply
- Power Factor > 0.9; THD < 20%
- 100,000-hour L70 lifetime, TM-21 standards @ 25°C

CONTROLS:

120-277VAC Photocell:

Multivariable voltage photocontrols power the fixture when light levels reach 20 lux or below, and turn it off at 30 lux or higher. The operating temperature of the photocontrols are -30°F-120°F. Photocell mounted externally.

DIMENSIONS:

See page 2 for dimensional drawings.

MODEL SELECTION (Full list of order codes on pg. 2)		Typical order example: WP-ADS20U-50B						
FAMILY	HOUSING SIZE	NOMINAL WATTAGE (EQUIVALENCY)	VOLTAGE	-	CCT	FINISH	-	CONTROLS
WP-AD= Wall Pack Adjustable	S= Small	15= 15W; 100W MH Equivalent 20= 20W; 150W MH Equivalent 29= 29W; 175W MH Equivalent	U= 120-277V	-	40= 4000K 50= 5000K	B= Bronze	-	(OMIT)= None PC= 120-277V Photocell
	L= Large	50= 50W; 250W MH Equivalent 70= 70W; 250W MH Equivalent						

NOTES:

Made-to-order item. Please contact your MaxLite representative for order quantities and lead times.

SPECIFICATIONS:


		WP-ADS15	WP-ADS20	WP-ADS29	WP-ADL50	WP-ADL70
ITEM	SPECIFICATION	DETAILS				
GENERAL PERFORMANCE	Input Power (W)	15	20	29	50	70
	Lumens Delivered (lm) (4000K)	1,690	2,110	3,000	4,500	7,790
	Lumens Delivered (lm) (5000K)	1,575	2,100	3,000	5,000	8,200
	Efficacy (lm/W)	up to 105				up to 116
	CRI	>70				
	Lumen Maintenance (L70)	≥100,000				
	Color Temperature	4000K, 5000K				
	Spacing Criteria	Available Upon Request				
ELECTRICAL	Power Factor	>.90				
	Input Voltage	120-277V				
	Housing	Die-cast aluminum + Prismatic lens				
CERTIFICATION	Material Usage	RoHS compliant; no mercury				
	Environment	Outdoor, Wet location				
	Qualifications	FCC, ETL, DLC 4.1 Standard				
	Warranty	5 Years				
	Operating Temperature	-22°F to 131°F (-30°C to 55°C)				

*Note: 50-Watt models are not listed on the QPL.

ORDERING:

ORDER CODE	MODEL	CONTROLS	FINISH	VOLTAGE	WATTAGE (W)	CCT
1409969	WP-ADS15U-50B	None	Bronze	120-277V	15W	5000K
107999	WP-ADS20U-50B				20W	
108000	WP-ADS29U-50B				29W	
1409972	WP-ADL50U-50B				50W	
108001	WP-ADL70U-50B				70W	
100527	WP-ADS15U-50B-PC	120-277V Photocell			15W	
108002	WP-ADS20U-50B-PC				20W	
108003	WP-ADS29U-50B-PC				29W	
100211	WP-ADL50U-50B-PC				50W	
108004	WP-ADL70U-50B-PC				70W	

DIMENSIONS 15W, 20W & 29W:

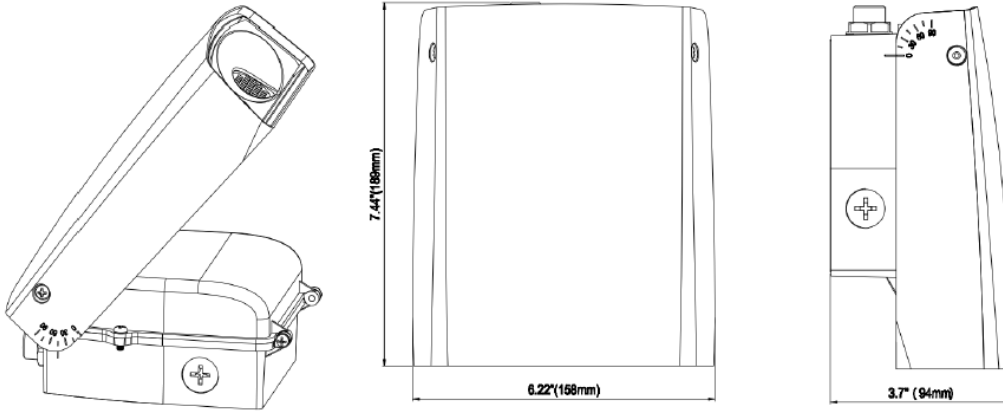

DIMENSIONS 50 & 70W:

