

**ADJUSTABLE WALL PACK**  
WALLMAX SERIES



70W model shown



**PRODUCT DESCRIPTION:**

Adjustable, installation-friendly LED Adjustable Wall Packs are constructed with pivoting heads that aim light precisely while minimizing glare and backlight. These durable, energy-saving fixtures are perfect for lighting outdoor walkways, landscapes, parking areas and perimeters. Efficacy for the series reaches up to 116 lm/W, translating to 75 percent energy savings over HID luminaires. The fixtures include a variable voltage photocell that provides further energy savings.

**FEATURES:**

- Fixture head pivots fully up to 90° from mounting plane
- >70 CRI min
- Universal 120-277V power supply
- Power Factor > 0.9; THD < 20%
- 100,000-hour L70 lifetime, TM-21 standards @ 25°C

**CONTROLS:**

**120-277VAC Photocell:**

multivariable voltage photocontrols power the fixture when light levels reach 20 lux or below, and turn it off at 30 lux or higher. The operating temperature of the photocontrols are -30°F-120°F. Photocell mounted externally.

**DIMENSIONS:**

See page 2 for dimensional drawings.

MODEL SELECTION (Full list of order codes on pg. 2)			Typical order example: WP-ADS20U-50B					
WP-AD			U			B		
FAMILY	HOUSING SIZE	NOMINAL WATTAGE (EQUIVALENCY)	VOLTAGE	-	CCT	FINISH	-	CONTROLS
WP-AD= Wall Pack Adjustable	S= Small	20= 20W; 150W MH Equivalent 29= 29W; 175W MH Equivalent	U= 120-277V	-	*40= 4000K 50= 5000K	B= Bronze	-	OMIT= None PC= 120-277V Photocell
	L= Large	70= 70W; 250W MH Equivalent						

**NOTES:**

\*Made-to-order item. Please contact your MaxLite representative for order quantities and lead times.


**SPECIFICATIONS:**

ITEM	SPECIFICATION	WP-ADS20	WP-ADS29	WP-ADL70
		DETAILS		
GENERAL PERFORMANCE	Input Power (W)	20	29	70
	Lumens Delivered (lm) (4000K)	2,110	3,000	7,790
	Lumens Delivered (lm) (5000K)	2,100	3,100	8,200
	Efficacy (lm/W)	up to 105		up to 116
	CRI	>70		
	Lumen Maintenance (L70)	≥100,000		
	Color Temperature	5000K		
	Spacing Criteria	Available Upon Request		
ELECTRICAL	Power Factor	>.90		
	Input Voltage	120-277V		
	Housing	Die-cast aluminum + Prismatic lens		
CERTIFICATION	Material Usage	RoHS compliant; no mercury		
	Environment	Outdoor, Wet location		
	Qualifications	FCC, ETL, DLC 4.1 Standard		
	Warranty	5 Years		
	Operating Temperature	-22°F to 131°F (-30°C to 55°C)		

**ORDERING:**

ORDER CODE	MODEL	CONTROLS	FINISH	VOLTAGE	WATTAGE (W)	CCT
107999	WP-ADS20U-50B	None	Bronze	120-277V	20W	5000K
108000	WP-ADS29U-50B				29W	
108001	WP-ADL70U-50B				70W	
108002	WP-ADS20U-50B-PC	120-277V Photocell			20W	
108003	WP-ADS29U-50B-PC				29W	
108004	WP-ADL70U-50B-PC				70W	

**DIMENSIONS 20W & 29W:**

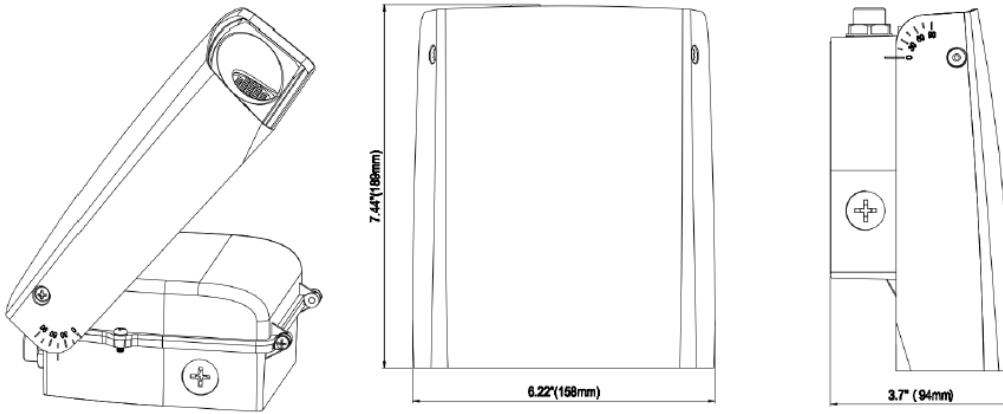

**DIMENSIONS 70W:**

