

PROJECT NAME: _____

CAT. #: _____



NOTES: _____

FIXTURE SCHEDULE: _____

AE Switch Area Light



Toolless housing access



Switchable Wattage/
CCT/Distribution



150W with Slipfitter

150W with Arm

Product Description

The AE Switch Area Light offers tremendous selectability and controls capabilities. Besides CCT and Wattage choices, it expands its versatility to include changing distributions between Types III, IV and V! It covers wattages ranging from 75W-300W in either 120-277V or 277-480V using two low EPA housings. It also offers a variety of mounting options along with visor accessories. All of this is available with robust surge protection and Maxlite's proven quality bringing you great value in a competitive Value Series package.

Features

- 27 performance options just a switch away!
 - Distribution Types III, IV or V
 - CCT selectable between 3000/4000/5000K
 - Wattage selectable
- c-Max and/or twist lock receptacle control options
- Universal 120-277V standard, High Voltage 277-480V option
- Robust surge protection - 6kV + 10kA standard with 20kA option
- Toolless housing access for easier maintenance
- Variety of mountings - Arm, Slipfitter and Trunnion
- ANSI 3G vibration rated
- TAA compliance available - contact Maxlite for details

Model Selection

FAMILY	WATTAGE	VOLTAGE	DISTRIBUTION	-	CCT	FINISH	MOUNTING*	CONTROL OPTIONS (FACTORY INSTALLED)	SURGE
AE = Slim Area	100 = 75/85/100W	U = 120-277V H = 277-480V	MC = Choice between Types III, IV or V	-	WCS = CCT/Wattage Selectable (3/4/5K)	B = Bronze <i>Contact Maxlite for additional finishes.</i>	STANDARD K = Upper half knuckle attached with 6' SO cord <i>Order lower half flexible arm or slipfitter (2 3/8" OD) separately - see Mounting Guide & Accessories Chart</i> FACTORY INSTALLED OPTIONS** A = Straight Arm T = Trunnion 2 = Flexible Arm and Slipfitter included <small>* Arms fit both square and round poles - see Installation Manual</small> <small>** For Field Installed Options - see Mounting Guide & Accessories chart</small>	CR = Controls ready for c-Max Controls RPC = 3-pin twist lock receptacle PR7 = 7-pin twist lock receptacle	Blank = 6kV +10kA Surge Protection (Standard) S = 20kA Surge Protection <i>Factory Installed</i>
	150 = 100/125/150W								
	200 = 150/175/200W								
	300 = 200/250/300W								



Mounting Guide

Flexible Arm or Slipfitter (attach to Upper Knuckle)

Upper Knuckle "K"

Slipfitter

Flexible Arm



K Upper knuckle (attached, standard)


AE-KLH Slipfitter (lower half of knuckle, ordered separately)

AE-FLH Flexible Arm (lower half of knuckle, ordered separately)

Upper Knuckle is attached to the fixture and includes 6' SO cord. It is the mounting point for Flexible Arm & Slipfitter which are ordered separately.

Field installed options

Upper Knuckle "K"



AE-SAB Straight Arm (field installed)

MAE-TSB Trunnion (field installed)

Remove factory installed upper knuckle "K".
Install Straight arm or Trunnion mount.

For Factory installed options, see Mounting in Model Selection matrix



5-year standard warranty (further details available at www.maxlite.com/warranties)



AE Switch Area Light

DLC Chart

Primary Use Designation: Outdoor Pole/Arm-Mounted Area and Roadway Luminaires

Universal Models

MODEL #	DLC PRODUCT ID
AE100U[MC,IR]-WCS[ALL OPTIONS]	S-NIRGY3
AE150U[MC,IR]-WCS[ALL OPTIONS]	S-BXDJ7Q
AE200U[MC,IR]-WCS[ALL OPTIONS]	S-QK1ZGD
AE300U[MC,IR]-WCS[ALL OPTIONS]	S-9PSMD0

High Voltage Models

MODEL #	DLC PRODUCT ID
AE100H[MC,IR]-WCS[ALL OPTIONS]	S-MVN60V
AE150H[MC,IR]-WCS[ALL OPTIONS]	S-6SNRKR
AE200H[MC,IR]-WCS[ALL OPTIONS]	S-JVSXLX
AE300H[MC,IR]-WCS[ALL OPTIONS]	S-2H7WRV

Accessories (Sold Separately)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
112467	AE-SHIELD-SM	AE CHANGEABLE OPTICS FRONT/BACK SHIELD <150W, EPA=0.47	
112468	AE-SHIELD-LG	AE CHANGEABLE OPTICS FRONT/BACK SHIELD >150W, EPA=0.64	
112465	AE-VISOR-SM	AE CHANGEABLE OPTICS SIDE VISOR <150W, EPA=0.65	
112466	AE-VISOR-LG	AE CHANGEABLE OPTICS SIDE VISOR >150W, EPA=0.84	
111983	AE-FLH	LOWER KNUCKLE ARM ATTACHES TO UPPER HALF OF THE KNUCKLE (K) ON THE FIXTURE	
111984	AE-KLH	LOWER KNUCKLE SLIPFITTER ATTACHES TO UPPER HALF OF THE KNUCKLE (K) ON THE FIXTURE	
111217	AE-SAB	STRAIGHT ARM FOR AE SERIES, BRONZE (REMOVE UPPER KNUCKLE TO INSTALL, SEE MOUNTING GUIDE ABOVE)	
112461	MAE-TSB	TRUNNION SWIVEL FOR AE SERIES, BRONZE (REMOVE UPPER KNUCKLE TO INSTALL, SEE MOUNTING GUIDE ABOVE)	
105038	PCTL-UNV	TWIST-LOCK ELECTRONIC PHOTOCONTROL 120/208/240/277V (USED WITH RPC OR PR7 OPTION, NOT C-MAX)	
105866	PCTL-HV	TWIST-LOCK ELECTRONIC PHOTOCONTROL 480V (USED WITH RPC OR PR7 OPTION, NOT C-MAX)	
96268	MLRTLPCRSP	SHORTING CAP FOR NEMA TWIST LOCK PHOTOCELL RECEPTACLE (3, 5 OR 7 PIN)	
c-Max Basic			
105567	CN-REMOTE	C-MAX REMOTE CONTROL, AT LEAST 1 PER PROJECT TO PROGRAM MOTION SENSOR (RPC OR PR7)	
105569	CN-RDPCB†	C-MAX PHOTOCELL NODE ROUND, BRONZE, IP66, USED WITH CONTROLS READY FIXTURES	
105566	CN-RDMSB†*	C-MAX CONTROL NODE ROUND, PIR MOTION SENSOR/PHOTOCELL, BRONZE, IP66, USED WITH CONTROLS READY FIXTURES	
c-Max Network**			
105897	NN-RDB	NETWORK NODE ROUND, BRONZE	
111459	NN-RDMPBXR	NETWORK NODE ROUND, PIR MOTION SENSOR, PHOTOCELL, BLACK, EXTENDED (XR) RANGE	
106391	NN-RDW	NETWORK NODE ROUND, WHITE	

† Requires 1.5M Allen wrench

* Requires at least 1 remote control (CN-REMOTE) per project to program

** Requires c-Max App



AE Switch Area Light

Specifications	AE100	AE150	AE200	AE300
Nominal Wattage & Distribution Type	Selectable 100/85/75W Type III, IV or V distribution	Selectable 150/125/100W Type III, IV or V	Selectable 200/175/150W Type III, IV or V	Selectable 300/250/200W Type III, IV or V
Type III (Default setting) Lumens Range (lm) (Lumens depend on CCT setting)	100W* 15,790 - 16,390 lm	150W* 21,640 - 22,810 lm	200W* 28,970 - 30,090 lm	300W* 43,220 - 45,670 lm
	85W 12,750 - 13,650 lm	125W 18,120 - 20,750 lm	175W 25,550 - 28,090 lm	250W 37,000 - 40,660 lm
	75W 10,950 - 11,770 lm	100W 15,790 - 16,390 lm	150W 21,640 - 22,810 lm	200W 28,970 - 30,090 lm
TYPE III BUG rating (3K/4K/5K)	B3, U0, G3	B3, U0, G3	B4, U0, G4	B4, U0, G4
Type IV Lumens Range (lm) (Lumens depend on CCT setting)	100W* 15,930 - 16,550 lm	150W* 21,970 - 23,030 lm	200W* 28,800 - 29,860 lm	300W* 43,680 - 45,030 lm
	85W 12,750 - 13,650 lm	125W 18,120 - 20,750 lm	175W 25,550 - 28,090 lm	250W 37,000 - 40,660 lm
	75W 10,950 - 11,770 lm	100W 15,930 - 16,550 lm	150W 21,970 - 23,030 lm	200W 28,800 - 29,860 lm
TYPE IV BUG rating (3K/4K/5K)	B3, U0, G3	B4, U0, G4	B4, U0, G4	B5, U0, G5
Type V Lumens Range (lm) (Lumens depend on CCT setting)	100W* 15,260 - 15,900 lm	150W* 21,360 - 23,030 lm	200W* 28,850 - 30,020 lm	300W* 43,700 - 45,000 lm
	85W 12,750 - 13,650 lm	125W 18,120 - 20,750 lm	175W 25,550 - 28,090 lm	250W 37,000 - 40,660 lm
	75W 10,950 - 11,770 lm	100W 15,260 - 15,900 lm	150W 21,360 - 23,030 lm	200W 28,850 - 30,020 lm
TYPE V BUG rating (3K/4K/5K)	3K: B4, U0, G3	3K: B4, U0, G4	3K: B4, U0, G4	3K: B5, U0, G5
Efficacy (lm/w)	146 - 168	145 - 166	146 - 161	146 - 163
EPA (sq ft) - w/ Slipfitter** 0° Horizontal / 90° Vertical	0° = 0.4343988	0° = 0.4343988	0° = 0.4849236	0° = 0.4849236
	90° = 1.699908	90° = 1.699908	90° = 2.676216	90° = 2.676216
EPA (sq ft) - w/ Adjustable Arm** 0° Horizontal / 30° Vertical	0° = 0.5203704	0° = 0.5203704	0° = 0.573006	0° = 0.573006
	30° = 0.8542836	30° = 0.8542836	30° = 1.431732	30° = 1.431732
CRI	>80			
Color Temperature (K)	3000K/4000K/5000K Selectable (Default CCT: 5000K)			

* Default power setting

**See Accessories section description for Shield and Visor EPA values



AE Switch Area Light


Specifications	AE100	AE150	AE200	AE300
Voltage	120-277V, 277-480V option			
Dimming	0-10V, compatible with c-Max Controls, 3pin or 7pin twist lock NEMA receptacle option			
Surge Protection	6kV integral to driver + 10kA stand alone standard, 20kA option			
Lumen Maintenance (L70) hrs	100,000+ Hours			
Housing	Die Cast Aluminum with corrosion resistant polyester powder coat			
Lens	Polycarbonate			
Mounting	<p>Standard upper half knuckle with 6' SO cord attached</p> <ul style="list-style-type: none"> - Order lower half Flexible Arm (AE-FLH) or Slipfitter (AE-KLH - 2 3/8" OD) separately - see Accessories Chart & Mounting Guide <p>Additional choices for factory install</p> <ul style="list-style-type: none"> - Straight Arm (A), Trunnion (T) or both Flexible Arm and Slipfitter in same carton (2) - See Accessories Chart & Mounting Guide for field installable mountings <p><i>NOTE: Arms fit both square and round poles, see Installation Manual</i></p>			
Weight w/ Slipfitter	10.09 lbs	10.09 lbs	13.91 lbs	13.91 lbs
Weight w/ Arm	10.38 lbs	10.38 lbs	14.17 lbs	14.17 lbs
Weight w/ Trunnion	12.86 lbs	12.86 lbs	17.91 lbs	17.91 lbs
Operating Temperature	-40°C/40°F - 50°C/122°F (based on outdoor dusk to dawn operation in non-hazardous applications)			
Listings	UL, FCC, RoHS, DLC, ANSI 3G, TAA Available			
DLC	Premium - Outdoor Pole/Arm-Mounted Area and Roadway Luminaires			
Environmental	IP65, Wet Location			
Warranty	5 Years (see Maxlite warranty page for details)			

AE Switch Area Light


DIMENSIONS

100W & 150W


Slipfitter

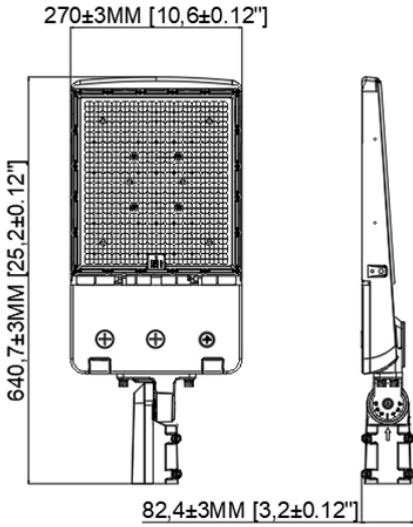

Arm

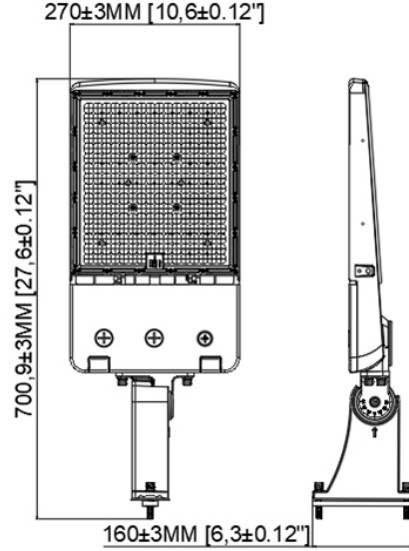


Trunnion

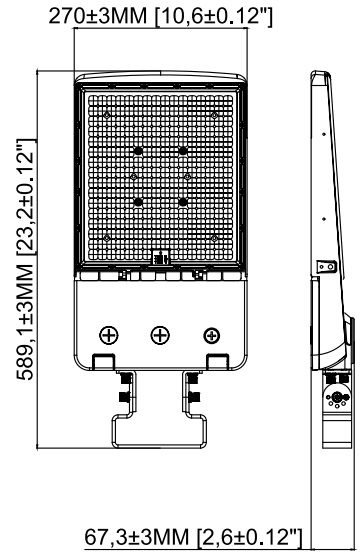


200W & 300W


Slipfitter

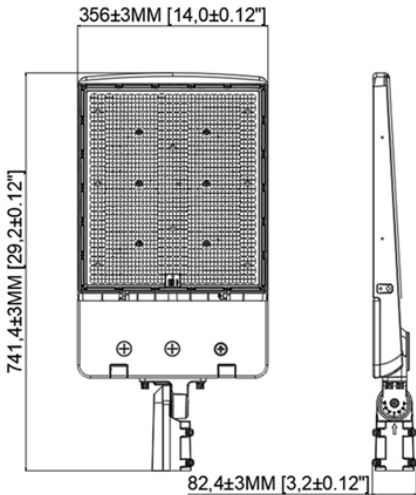

Arm

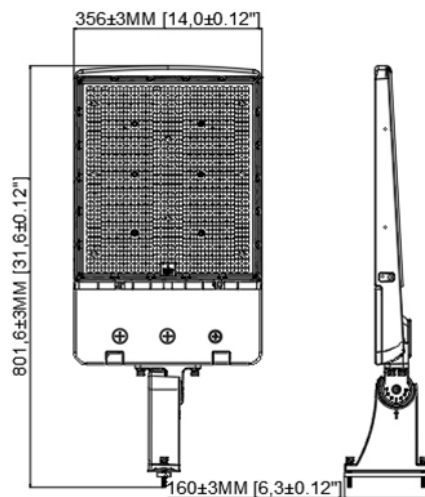

Trunnion

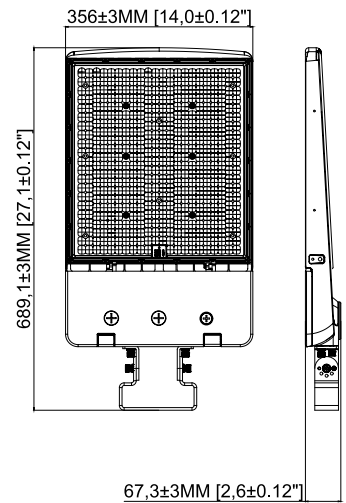

AE Switch Area Light

PHOTOMETRICS

ISOFOOTCANDLE:

- Each gridline represents one mounting height.
- For mounting heights other than noted multiply FC by the below factor.

$$\text{Factor} = \frac{(\text{Chart's Mtg. Height})^2}{(\text{Actual Mtg. Height})^2}$$

LEGEND

 0.2 fc	 0.5 fc	 1.0 fc
 2.0 fc	 5.0 fc	 10.0 fc

