

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

LED Enclosed Rated Omnidirectional A-Lamp A19 Gen 2T Series



Product Description:

MaxLite's LED enclosed rated Omnidirectional A-Line lamp replicate true A19 incandescents. They are suited to a wide variety of residential and commercial applications, including pendants, wall sconces, table and floor lamps.

Features:

- Dimmable down to 10%
- Suitable for damp locations
- Suitable for use in enclosed luminaires

Applications:

- Pendants
- Table and floor lamps
- Sconces

Warranty:

- 5 year standard warranty

Ordering Information

| FAMILY | BASE | DIMMABILITY | CCT* | PACKAGING AND GENERATION |
|--|-------------------|---------------------------|--|--|
| E8A19= 8W A19 E13A19= 13W A19 | BLANK= E26 | DLED= Dimmable LED | 27= 2700K 30= 3000K 40= 4000K 50= 5000K | /G2T= Generation 2T |
| E8A19= 8W A19 E10A19= 10W A19 E13A19= 13W A19 | BLANK= E26 | D= Dimmable LED | 27= 2700K 50= 5000K | /4P/WS2T= 4 Pack Wingstack, Generation 2T |

* 13W is available only on 3000K, 4000K, 5000K

Stocked Items

| ORDER CODE | MODEL NUMBER |
|------------|-------------------|
| 109717 | E8A19DLED30/G2T |
| 109725 | E13A19DLED30/G2T |
| 109726 | E13A19DLED40/G2T |
| 109727 | E13A19DLED50/G2T |
| 109543 | E8A19D27/4P/WS2T |
| 109712 | E10A19D27/4P/WS2T |
| 109713 | E10A19D50/4P/WS2T |
| 109714 | E13A19D27/4P/WS2T |
| 109715 | E13A19D50/4P/WS2T |



5-year standard warranty (further details available at www.maxlite.com/warranties) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

LED Enclosed Rated Omnidirectional A-Lamp A19 Gen 2T Series

Specifications

| Specifications | E8A19Dxxx2T | E10A19Dxx/4P/WS2T | E13A19Dxxx2T |
|-------------------------|---|-------------------|----------------------------|
| Base Type | E26 | | |
| Nominal Input Power (W) | 8W | 10W | 13W |
| Equivalency | 60W Incandescent | 75W Incandescent | 100W Incandescent |
| Lumens Delivered (lm) | 800 lm | 1100 lm | 1600 lm |
| Nominal Efficacy (lm/W) | 100 lm/W | 110 lm/W | 123 lm/W |
| CCT | 2700K, 3000K, 4000K, 5000K | 2700K, 5000K | 2700K, 3000K, 4000K, 5000K |
| CRI | ≥80 | | |
| Distribution | 200° - 250° | | |
| L70 Lifetime (Hours) | 25,000 hours | | |
| Dimming | Dimmable. Forward Phase Cut 10-100% | | |
| Input Voltage | 120V AC, 60Hz | | |
| Power Factor | ≥0.7 | | |
| Surge Protection | 2.5kV Ringing Wave | | |
| Diffuser | Polycarbonate | | |
| Operating Temperature | -4F to 104F | | |
| Listings | cULus listed, FCC, RoHS | | |
| Environment | Suitable for damp locations. Suitable for totally enclosed luminaries | | |
| Warranty | 5 years | | |
| Environment | Damp locations | | |
| Warranty | 5 years | | |

Dimming Compatibility

Compatible for E8A19Dxxx2T

| ORDER CODE | MODEL NUMBER |
|--------------|---|
| Lutron | DVCL-153P-WH, MACL-153MH-WH, TGCL-153P-WH, DVCL-153PR-WH, CTCL-153PDH-WH, P-PKG1W-WH, DIVA DVELV-300P-WH, SKYLARK SLV-600P-WH |
| Legrand | RHCL453PW |
| Leviton | WHITE NO.6674 600W, LIGH ALMOND NO.6672 600W, WHITE NO.IPL06 600W, DSL06-001-1LZ, IPL06-011-10Z, RDL06-001-10Z |
| Martin Jerry | MJ-SD01 |
| Wemo | F7C059 |

Compatible for E10A19Dxx/4P/WS2T

| ORDER CODE | MODEL NUMBER |
|--------------|---|
| Lutron | DVCL-153P-WH, MACL-153MH-WH, TGCL-153P-WH, DVCL-153PR-WH, CTCL-153PDH-WH, P-PKG1W-WH, DIVA DVELV-300P-WH, SKYLARK SLV-600P-WH |
| Legrand | RHCL453PW |
| Leviton | WHITE NO.6674 600W, LIGH ALMOND NO.6672 600W, WHITE NO.IPL06 600W, DSL06-001-1LZ, RDL06-001-10Z, SLIDE DIMMER SURESLIDE |
| Martin Jerry | MJ-SD01 |
| Wemo | F7C059 |


Compatible for E13A19Dxxx2T

| ORDER CODE | MODEL NUMBER |
|--------------|--|
| Lutron | MACL-153M-WH, DVCL-153P-WH, PD-6WCL-WH-P, MACL-153MH-WH, TGCL-153P-WH, DVCL-153PR-WH, CTCL-153PDH-WH, P-PKG1W-WH, DIVA DVELV-300P-WH, NLV-1000-LA, SKYLARK SLV-600P-WH, RADIORA2 RRD-6CL-WH, CL DIMMER TOGGLER, CASEFA WIRELESS, DIVA CL |
| Legrand | RHCL453PW |
| Leviton | WHITE NO.6674 600W, LIGH ALMOND NO.6672 600W, WHITE NO.IPL06 600W, RDL06-001-10Z, DSE06-001-10Z, DDMX1-011-BLZ, DDE06-BLZ 600W, SLIDE DIMMER SURESLIDE, SLIDE DIMMER, SLIDE DIMMER 3WAY |
| Martin Jerry | MJ-SD01 |
| Wemo | AAL06-C1 |

LED Enclosed Rated Omnidirectional A-Lamp A19 Gen 2T Series

Product Dimensions

| WATTAGE | WIDTH/ W (IN INCHES) | HEIGHT/ H (IN INCHES) |
|---------|----------------------|-----------------------|
| 8W | 2.36 | 4.2 |
| 10W | 2.56 | 4.49 |
| 13W | 2.56 | 4.6 |

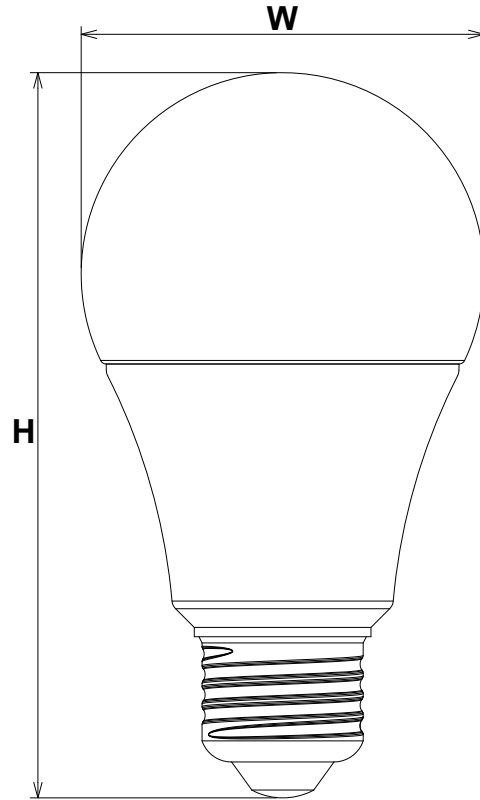

FCC REGULATORY STATEMENTS

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with FCC and IC safety levels of radio frequency (RF) exposure for Mobile devices.

This device is only authorized for use in a mobile application. At least 20 cm of separation distance between this device and the user's body must be maintained at all times.

Any changes or modifications not expressly approved by The Watt Stopper Inc. could void the user's authority to operate the equipment.