

Emergency and Exit Lights Wet Location Rated

FEATURES:

- High impact UV stabilized flame rated thermoplastic housing UL94 V-0 (High Capacity 5VA)
- 120V or 277V AC input
- Nickel Cadmium (NiCad) battery meets UL 90 minute emergency lighting requirement
- Test switch and AC-On indicator included
- Heads fully adjustable up, down and side to side
- Self Diagnostic option available
- Operating temperatures - High Capacity 10°C-40°C, general Indoor 20°C-30°C
- White finish standard, Black available as special order
- AC versions available as special order
- Single or double face with removable chevrons for Exit signs
- White finish standard, Black available as special order for Emergency Lights

CERTIFICATIONS:

- UL924 Listed for Wet Locations, WL suffix = listed for Wet Locations

WARRANTY:


5-year standard warranty* (further details available at www.maxlite.com/warranties)

*Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

EMERGENCY LIGHT WET LOCATION RATED




EML-2HMW-WL
EML-2HMW-WL2

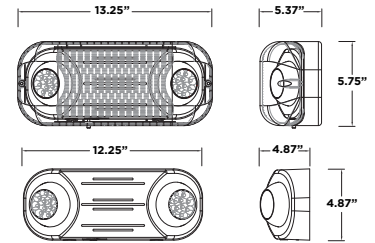

EMERGENCY LIGHT HIGH CAPACITY, 2 HEADS - WET LOCATION RATED




EML-2HWHC-WL
EML-2HWHCRC-WL

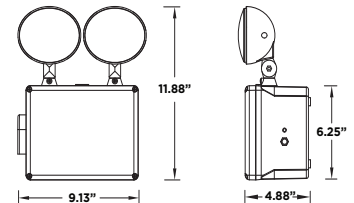


REMOTE HEADS (HIGH CAPACITY ONLY)* - WET LOCATION RATED



ERO-SWHC

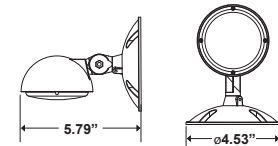

ERO-2HWHC

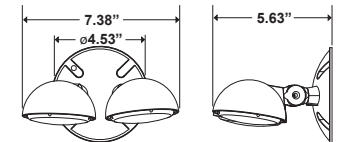


*Please see fixture compatibility chart below


EXIT SIGNS - WET LOCATION RATED



EX-RW-WL

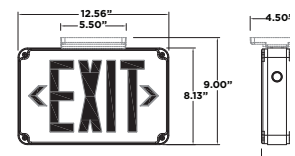

EXC-GW-WL

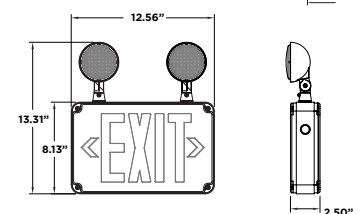

Emergency and Exit Lights Wet Location Rated

EMERGENCY LIGHT WET LOCATION ORDERING:

| PRODUCT IMAGE | ORDER NUMBER | MODEL | DESCRIPTION | PERFORMANCE |
|---------------|--------------|--------------|---|--|
| | 109731 | EML-2HMW-WL | Emergency Light LED, 2 MR16 Heads, White, 120v Or 277v, Battery Backup, Wet Locations | 58 lumen per head, 1.9W (120/277V) draw |
| | 109732 | EML-2HMW-WL2 | Emergency Light LED, 2 MR16 Heads, White, 120v Or 277v, Battery Backup -20°C, Wet Locations | 58 lumen per head, 1.9W (120/277V) draw |
| | 109733 | EML-2HWHC-WL | Emergency Light LED, 2 Heads, White, High Capacity, High Lumen Output, Battery Backup, Wet Locations | 78 lumens per head, 4.4/4.5W (120/277V) draw |
| | 109734 | EML-2HWHC-WL | Emergency Light LED, 2 Heads, White, High Capacity, Remote Capable Up To 6 Heads, Battery Backup, Wet Locations | 78 lumens per head, 4.4/4.5W (120/277V) draw, up to 12 additional remote heads |

REMOTE HEADS LIGHT WET LOCATION ORDERING:




| PRODUCT IMAGE | ORDER NUMBER | MODEL | DESCRIPTION | PERFORMANCE |
|---------------|--------------|-----------|--|---|
| | 109735 | ERO-SWHC | Emergency Remote Head, Outdoor (WL), Single, White, High Capacity Only | 72 lumens, 3.6V, 1.17W, WL listed |
| | 109736 | ERO-2HWHC | Emergency Remote Head, Outdoor (WL), Double, White, High Capacity Only | 72 lumens - per head, 3.6V, 1.17W - per head, WL listed |

EMERGENCY SIGNS WET LOCATION ORDERING







| PRODUCT IMAGE | ORDER NUMBER | MODEL | DESCRIPTION | PERFORMANCE |
|---------------|--------------|-------------|--|--|
| | 109737 | EX-GW-WL | Exit, Thermoplastic, Green Letters, White, Battery Backup, Wet Locations | - |
| | 109738 | EX-GWRC-WL | Exit, Thermoplastic, Green Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations | - |
| | 109739 | EX-GW-WL2 | Exit, Thermoplastic, Green Letters, White, Battery Backup -20°C, Wet Locations | - |
| | 109740 | EX-RW-WL | Exit, Thermoplastic, Red Letters, White, Battery Backup, Wet Locations | - |
| | 109741 | EX-RWRC-WL | Exit, Thermoplastic, Red Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations | - |
| | 109742 | EX-RW-WL2 | Exit, Thermoplastic, Red Letters, White, Battery Backup -20°C, Wet Locations | - |
| | 109743 | EXC-GW-WL | Exit Emergency Combo, Thermoplastic, Green Letters, White, Battery Backup, Wet Locations | 63 lumen per head, 3.08W (120/277V) draw |
| | 109744 | EXC-GWRC-WL | Exit Emergency Combo, Thermoplastic, Green Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations | 63 lumen per head, 3.08W (120/277V) draw |
| | 109745 | EXC-RW-WL | Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup, Wet Locations | 63 lumen per head, 1.89W (120/277V) draw |
| | 109746 | EXC-RWRC-WL | Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup, Remote Capable Up To 2 Heads, Wet Locations | 63 lumen per head, 1.89W (120/277V) draw |
| | 109747 | EXC-RW-WL2 | Exit Emergency Combo, Thermoplastic, Red Letters, White, Battery Backup -20°C, Wet Locations | 63 lumen per head, 1.89W (120/277V) draw |

Emergency and Exit Lights Wet Location Rated

REMOTE HEAD COMPATABILITY:

| | | EMERGENCY LIGHTS # OF REMOTE HEADS SUPPORTED | |
|--|--|--|--|
| | |  EML-2HWHCRC-WL | |
| REMOTE HEADS | | | |
|  ERO-SWHC | | 12 | |
|  ERO-2HWHC | | 6 | |

REMOTE HEAD COMPATABILITY:

| | | EXIT LIGHTS # OF REMOTE HEADS SUPPORTED | | | |
|--|--|---|---|--|--|
| | |  EX-GWRC-WL |  EX-RWRC-WL |  EXC-GWRC-WL |  EXC-RWRC-WL |
| REMOTE HEADS | | | | | |
|  ERO-SW | | 2 | 2 | 2 | 2 |
|  ERO-2HW | | 1 | 1 | 1 | 1 |