



PROJECT NAME: \_\_\_\_\_ CAT. #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_

# LED Flat Panel Retrofit Kit Wattage Color Select Controls Ready Series



### Description:

The Flat Panel Retrofit Kit is an Enhanced product offering from Maxlite offering easy and cost-effective solution to upgrade fluorescent troffers to LED. The kit utilizes the existing troffer housing, thereby reducing labor time and expense since installation can be performed from below the ceiling. An existing troffer can be retrofitted in just minutes! The kit's LED light source delivers uniform illumination with minimal glare, and creates a clean aesthetic that is perfect for offices, retail, health care, educational, hospitality and other commercial facilities. With a Wattage and CCT select option, each unit provides more than 9 variations of the product giving flexibility to the end users and distributors. The kit also boasts one of the industry's highest efficacy (140 LPW), and is DLC premium qualified offering the best ROI for ESCO projects with maximum energy savings. As a true Controls Ready (CR) product, this series takes advantage of Maxlite's Patented c-Max plug and play system offering end users controls option even if the current system is not wired for controls.

### Features:

- Quick Installation of Flat Panel Retrofit Kit in existing luminaire without the need to break the ceiling plenum.
- Design prevents any gaps from the retrofit fit in the existing troffer
- Includes safety cable to attach to housing

### Construction:

- Standard Dimension for 1x4, 2x2 & 2x4 Retrofits
- Fits most existing Troffers

### Form & Fit:

MaxLite recommends that a product sample is tested before projects begin to check fit of the retrofit kit. The retrofit kit is designed to fit into most preexisting troffers (lensed and parabolic).

### Controls Ready:

MaxLite's new Controls Ready (CR) fixtures allows for quick and easy in-field installation (plug and play) of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! See the accessory table for all controls options available for this fixture.

## Ordering Information

FAMILY	-	SIZE	DIMMABLE	WATTAGE SELECTABLE	-	CCT	CONTROLS READY	PACKAGING	BBU OPTION	SOURCE
FPR		14W= 1'x4'	D=Dimmable	15W= 15W/20W/25W		CS= Color Selectable 3500K/ 4000K/ 5000K	CR= Controls Ready	BLANK= None /2PK= 2 pack	BLANK= None EM= Battery Back up <sup>1</sup> E2= Made to order Emergency Back Up	TA= TAA Compliant
		22W= 2'x2'		15W= 15W/20W/25W						
		24W= 2'x4'		22W= 22W/30W/38W						
		<b>SIZE FOR FIXED WATTAGE</b>		<b>FIXED WATTAGE</b>						
		22= 2'x2'		13= 13W						
		24= 2'x4'		20= 20W						

1. Battery back up models are available only in Single Pack configuration. Check the Specification Table for lumen output for EM and E2 suffix.



**10-year standard warranty with labor allowance** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))

Warranty Limitations: Product must be rated for application per the Product Data Sheet (PDS); operated ≤16 hrs; in ambient temperatures -4°F to 77°F. If ambient temperatures fall outside the -4°F to 77°F range, product is warrantied for 5 years according to the operating temperature

range specified on the PDS. Up to \$25/unit; registration required. Additional coverage may be available for purchase; contact MaxLite. Excludes EM/MS versions; component warranty applies.







# LED Flat Panel Retrofit Kit Wattage Color Select Controls Ready Series

### Stocked Items

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID	PRIMARY USE DESIGNATION	CLASSIFICATION
110999	FPR14D15WCSR/2PKTA	S-34BTWP	Integrated Retrofit Kits for 1x4 Luminaires	Premium
110998	FPR14D15WCSCRTA	S-34BTWP	Integrated Retrofit Kits for 1x4 Luminaires	
111001	FPR22D13CSCR/2PKTA	S-5QY5SX	Integrated Retrofit Kits for 2x2 Luminaires	
111003	FPR22D15WCSR/2PKTA	S-VSB9C5	Integrated Retrofit Kits for 2x2 Luminaires	
111221	FPR22D15WCSCREMTA	S-VSB9C5	Integrated Retrofit Kits for 2x2 Luminaires	
111002	FPR22D15WCSCRTA	S-VSB9C5	Integrated Retrofit Kits for 2x2 Luminaires	
111005	FPR24D20CSCR/2PKTA	S-9H5Q1T	Integrated Retrofit Kits for 2x4 Luminaires	
111007	FPR24D20WCSR/2PKTA	S-022X43	Integrated Retrofit Kits for 2x4 Luminaires	
111222	FPR24D22WCSCREMTA	S-022X43	Integrated Retrofit Kits for 2x4 Luminaires	
111006	FPR24D22WCSCRTA	S-022X43	Integrated Retrofit Kits for 2x4 Luminaires	

### Accessories (SOLD SEPARATELY)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
111057	FPR-ARB-24	FPR Air Return Bracket - For Use With 2x2 FPR - 2PC in Polybag	
111057	FPR-ARB-48	FPR Air Return Bracket - For Use With 1x4 and 2x4 FPR - 2PC in Polybag	
108566	EBUUP17015N200B **	Emergency Inverter, 15W, 120-347 VAC, CEC Compliant, Field Installable, 0-50°C Ambient Lumens Delivered at field install BBU mode (lm): 2900 lm - for 90 mins, when fully charged	
111054	FPR-BBUBRACKET14 **	BBU Bracket for 1X4 FPR (2PC Bracket + Hardware)	
111055	FPR-BBUBRACKET2224 **	BBU Bracket for 2X2 AND 2X4 FPR (1PC Bracket + Hardware)	
111289	EBU-RTST-E15 **	Ribbon Flat Test Switch for Espen Emergency Inverter, 15W - EBUUP17015N200B	

\*Maxlite recommends CN-RTPSW (PIR) sensor for most applications with this fixture.

If CN-RTMST(microwave) is required for an application, Maxlite recommends a pilot test to confirm there is no interference that causes unexpected responses from the microwave sensor.

\*\* For Field Install BBU option, purchase BBU model# EBUUP17015N200B along with the ribbon flat test switch model# EBU-RTST-E15 and the mounting bracket FPR-BBUBRACKET14 for 1x4, or FPR-BBUBRACKET2224 for 2x2/ 2x4. Lumens delivered at BBU mode varies based on wattage and CCT setting. Lumens Delivered at field install BBU mode (lm):2900 lm - for 90 minutes, when fully charged.



# LED Flat Panel Retrofit Kit *Wattage Color Select Controls Ready Series*

## c-Max Controls Microsites and Compatibility Guide

<p><b>BASIC LIGHTING CONTROLS</b></p> <p>Microsite</p>	<p><b>NETWORK LIGHTING CONTROLS</b></p> <p>Microsite</p>	<p>Product Compatibility Guide</p>
<p><b>EasyRF™ LIGHTING CONTROLS</b></p> <p>Microsite</p>	<p><b>NETWORK PARTNERS</b></p> <p>Microsite</p>	

### Compatible Controls (SOLD SEPARATELY)+

The table below shows a small subset of control nodes from each tier that directly plug in with the fixture. Refer to individual microsites above for more accessories that could be added based on application requirements.

ORDER CODE	MODEL NUMBER & LINK TO DATA SHEET	DESCRIPTION	QR CODE TO DATA SHEET	IMAGE
<b>c-Max Basic</b>				
105567	<a href="#">CN-REMOTE</a>	CONTROL NODE REMOTE CONTROL		
105890	<a href="#">CN-RTPSW<sup>1</sup></a>	CONTROL NODE RECTANGULAR, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
<b>c-Max Network</b>				
105892	<a href="#">NN-RTW</a>	NETWORK NODE RECTANGULAR, WHITE		
105893	<a href="#">NN-RTDHW</a>	NETWORK NODE RECTANGULAR, DAYLIGHT HARVESTING, WHITE		
106059	<a href="#">NN-RTPSW</a>	NETWORK NODE RECTANGULAR, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
<b>c-Max EasyRF</b>				
110961	<a href="#">RF-RTPSW</a>	EasyRF NODE RECTANGULAR, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
110962	<a href="#">RF-REMOTE</a>	EasyRF REMOTE CONTROL COMMISSIONING TOOL		
<b>c-Max Network Partners - Silvair</b>				
110431	<a href="#">NN-RTPSW-SL</a>	SILVAIR NETWORK NODE RECTANGULAR, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
111148	<a href="#">NN-RTW-SL</a>	SILVAIR NETWORK NODE RECTANGULAR, WHITE		
<b>c-Max Network Partners - Casambi</b>				
112428	NN-RTPSW-CA	CASAMBI NETWORK NODE RECTANGULAR, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
112429	NN-RTW-CA	CASAMBI NETWORK NODE RECTANGULAR, WHITE		

<sup>1</sup> Maxlite recommends CN-RTPSW (PIR) sensor for most applications with this fixture. If CN-RTMST(microwave) is required for an application, Maxlite recommends a pilot test to confirm there is no interference that causes unexpected responses from the microwave sensor. For additional options and c-Max network Partners components check Maxlite.com/cmax

\* Note - This controls ready fixture is compatible with the c-Max platform supporting multiple tiers of controls. The table above shows a small subset of control nodes from each tier that directly plug in with the fixture. Refer to individual microsite above for more accessories that could be added based on application requirements



# LED Flat Panel Retrofit Kit Wattage Color Select Controls Ready Series


Specifications	FPR14D15WCSCR			FPR22D15WCSCR			FPR22D13CSCR
Size	1X4'			2X2'			2X2'
Nominal Wattage (W)	15W	20W	25W	15W	20W	25W	13W
Lumens Delivered (lm)	2035, 2087**, 2079	2728, 2797, 2788	3335, 3420, 3408	2146, 2203 **, 2201	2881, 2958, 2955	3550, 3645, 3641	1920, 1949*, 1929
Nominal Efficacy ( lm/W)	138, 144**, 140	135, 141, 137	133, 139, 135	145, 154**, 150	142, 150, 146	139, 147, 143	141, 146*, 142
Lumens Delivered at BBU mode (lm)	1050lm with EM suffix. 2900lm with E2 suffix - for 90 minutes, when fully charged						
CCT	3500K, 4000K*, 5000K						
CRI	≥80						
L70 Lumen Maintenance (Hours)	100,000 hrs						
Dimming Technology	0-10V						
Dimming Range	10-100%						
Input Voltage	120-277V AC						
Power Factor	≥0.9						
Housing	Steel White						
Diffuser	PolyStyrene Lens						
Humidity	10% to 80% RH Non-Condensing						
Operating Temperature	-4°F to +122°F (-20°C to +50°C), except BBU models. BBU models: 50°F to +122°F (10°C to +50°C)						
Certifications	ETL listed for damp locations, RoHS Compliant, FCC						
Qualifications	DLC Premium						
Warranty	10 years						

Specifications	FPR24D22WCSCR			FPR24D20CSCR	
Size	2X4'			2X4'	
Nominal Wattage (W)	22W	30W	38W	20W	
Lumens Delivered (lm)	3083, 3152 **, 3136	4091, 4183, 4162	5342, 5462, 5435	2918, 2966*, 2944	
Nominal Efficacy ( lm/W)	145, 152**, 149	142, 149, 146	137, 144, 141	144, 149*, 145	
Lumens Delivered at BBU mode (lm)	1050lm with EM suffix. 2900lm with E2 suffix - for 90 minutes, when fully charged				
CCT	3500K, 4000K*, 5000K				
CRI	≥80				
L70 Lumen Maintenance (Hours)	100,000 hrs				
Dimming Technology	0-10V				
Dimming Range	10-100%				
Input Voltage	120-277V AC				
Power Factor	≥0.9				
Housing	Steel White				
Diffuser	PolyStyrene Lens				
Humidity	10% to 80% RH Non-Condensing				
Operating Temperature	-4°F to +122°F (-20°C to +50°C), except BBU models. BBU models: 50°F to +122°F (10°C to +50°C)				
Certifications	ETL listed for damp locations, RoHS Compliant, FCC				
Qualifications	DLC Premium				
Warranty	10 years				

\* Factory default CCT is 4000K. \*\* Factory default is lowest wattage at 4000K

**LED Flat Panel Retrofit Kit** *Wattage Color Select Controls Ready Series*

**Dimensions**

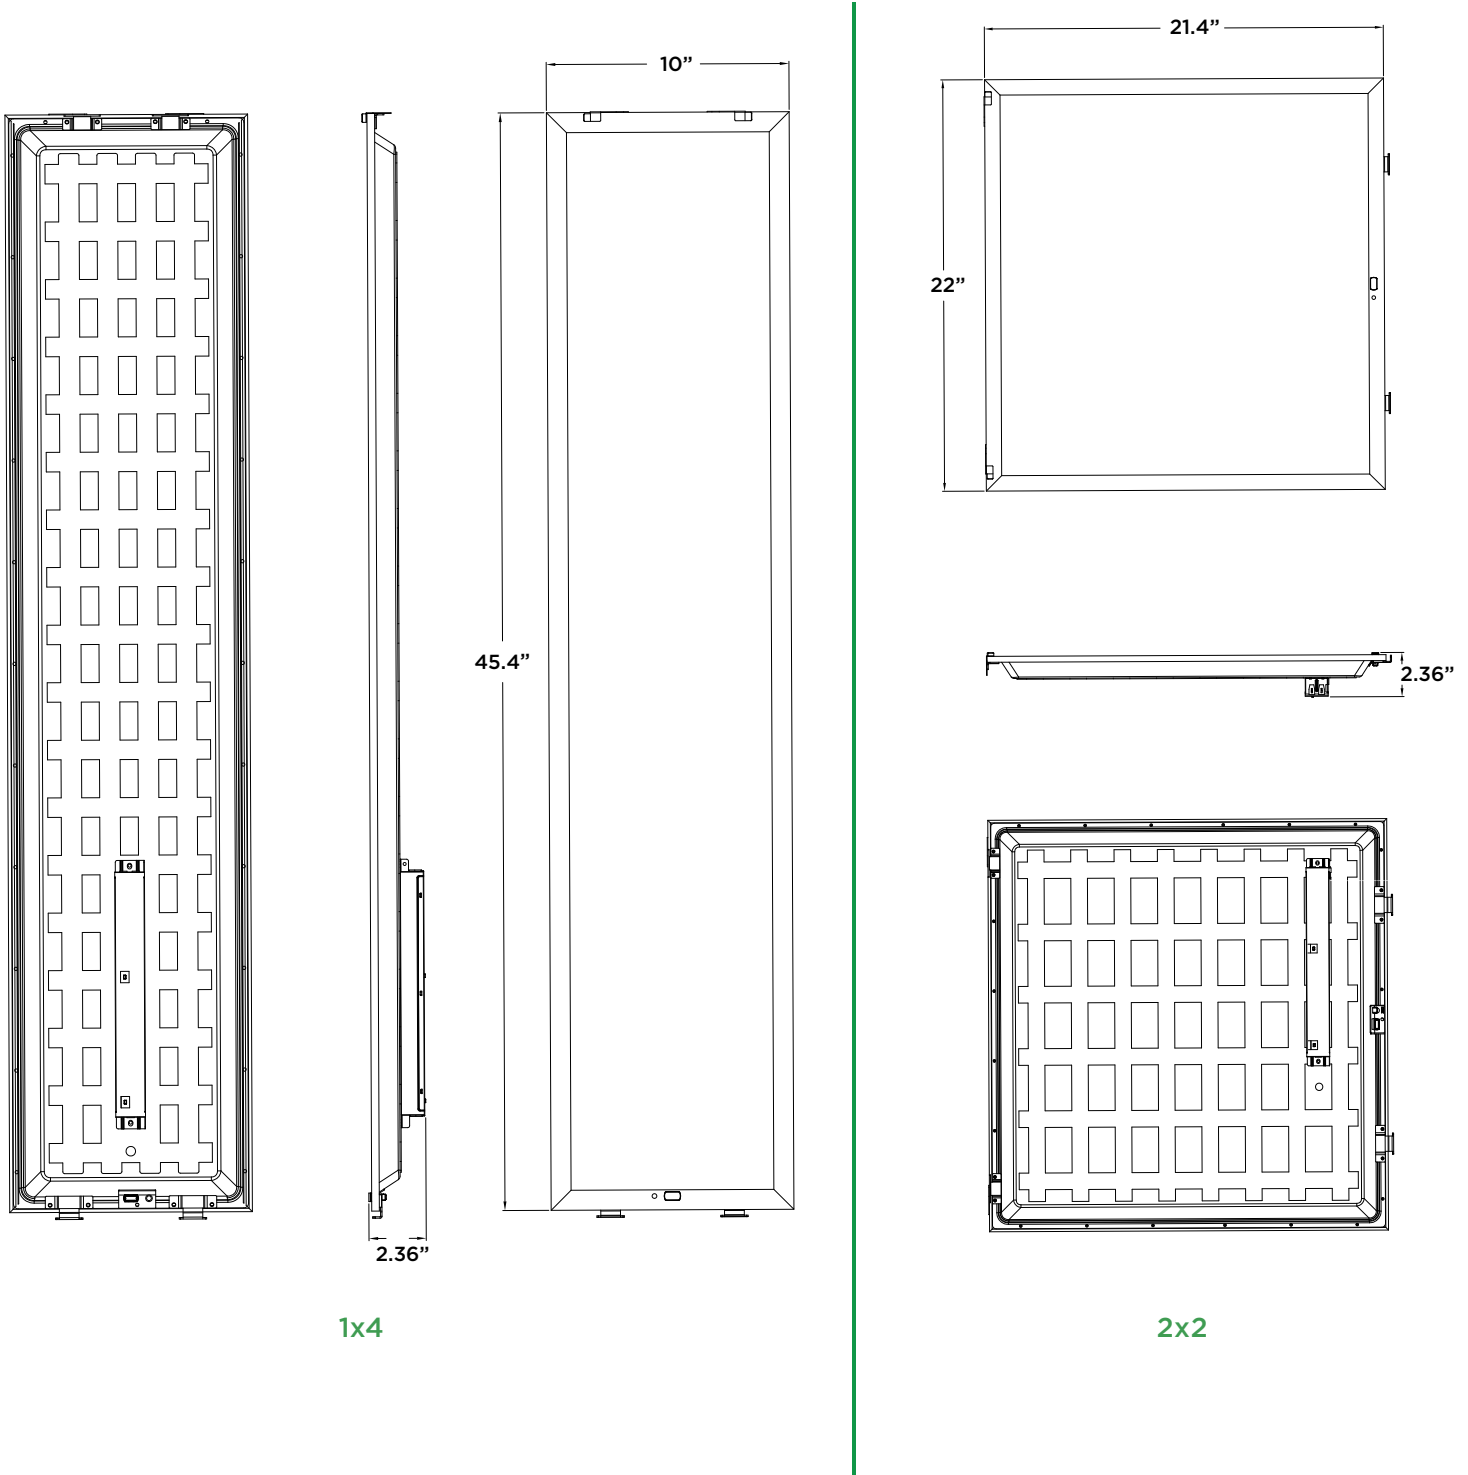


1x4

2x2

**LED Flat Panel Retrofit Kit**

*Wattage Color Select Controls Ready Series*

**Dimensions**

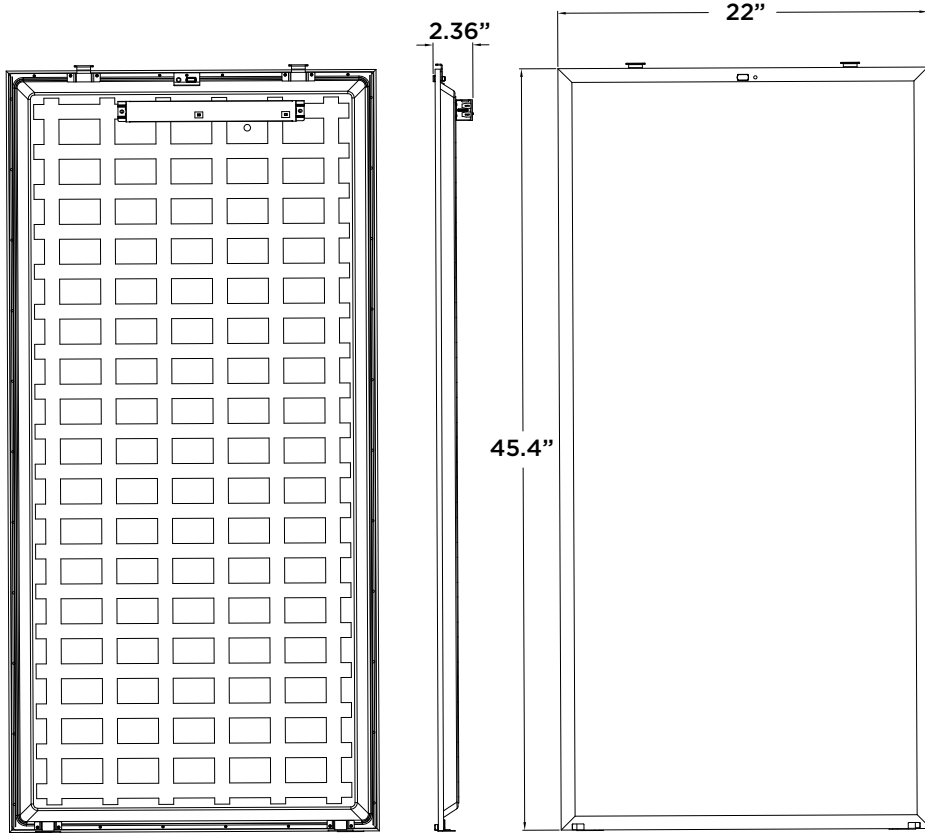

**2x4**

MODEL	L (INCH)	W (INCH)	H (INCH)	H (EM ADDED)
FPR24D22WCSCR	45.4	22	2.36	2.44
FPR22D15WCSCR	22	21.4		
FPR14D15WCSCR	45.4	10		
FPR24D20CSCR	45.4	22		
FPR22D13CSCR	22	21.4		

**FCC Statement**

This device complies with part 15 of the FCC Rules, Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.