

## LED T8 EXTERNAL DRIVER 3FT 11.5W



### PRODUCT DESCRIPTION:

MaxLite LED T8 with External Driver are the ideal energy saving choices when upgrading traditional linear T8 fluorescent lamps in fixtures containing standard G13 (medium bi-pin) sockets. **MaxLite lamps and drivers must be used together or UL is voided.**



### FEATURES:

- Instant on
- Dimmable to 10%
- Mercury free and virtually no UV or IR light
- Suitable for open or enclosed fixtures
- Suitable for dry and damp locations

### CONTROLS READY:

MaxLite's new Controls Ready (CR) fixtures allows for quick and easy in-field installation (plug and play) of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! See the accessory table for all controls options available for this fixture.

### WARRANTY:

5-year standard warranty (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties)) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

### 3FT 11.5W T8 TYPE C TUBE:

FAMILY	WATTAGE	LAMP TYPE	OPERATION	SIZE	CCT, LENS
L= LED	11.5= 11.5W	T8= T8 TUBE	EX= EXTERNAL DRIVER	3= 3-FT	35-CG-C = 3500K, Coated Glass 40-CG-C = 4000K, Coated Glass 50-CG-C = 5000K, Coated Glass

### DRIVERS COMPATIBLE WITH 3FT 11.5W T8 TYPE C TUBE:

FAMILY	# OF LAMPS	Wattage
DDR = External Driver	2 = 1 or 2 lamps 4 = 3 or 4 lamps	L11.5IND-CR = for 11.5W Type C tube


### STOCKED ITEMS

MODEL NUMBER	ORDER CODE
L11.5T8EX335-CG-C	104318
L11.5T8EX340-CG-C	105972
L11.5T8EX350-CG-C	104320

### SPECIFICATIONS:

ITEM	SPECIFICATION	3 - FOOT - DETAILS
<b>GENERAL PERFORMANCE</b>	Power Consumption (bare lamp)	11.5W
	System Power	13W
	Lumens Delivered	1650-1700 lm
	Efficacy	127-131 lm/W
	CRI	≥80
	Beam Angle	210°±10%
	Color Temperature (CCT)	3500K, 4000K & 5000K
	Lumen Maintenance (L70)	50,000 Hours
<b>ELECTRICAL</b>	Power Factor	≥ 0.90
	Input Voltage	120V-277V, 50/60 Hz
<b>PHYSICAL</b>	Operating Temperature	4°F to 113°F (-20 to 45°C)
	Lens	Coated Glass
	Base	Medium Bi-Pin (G13)
<b>CERTIFICATION</b>	Certification	cETLus, FCC
	Material Usage	RoHS compliant; no mercury
	Environment	Damp location
	Warranty	5 Years

### LINE DRAWING DIMENSION (G13LPNS)

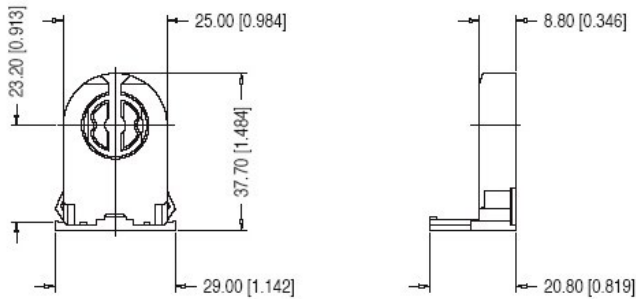

### ACCESSORIES (SOLD SEPARATELY):

ORDER CODE	MODEL NUMBER	DESCRIPTION	ACCESSORIES IMAGE
73978	G13LPNS	G13 Low Profile Non-Shunted Lamp Holder	
103548	T8C-BBU	Battery Back Up for Type C Linears	
105891	CN-MGMST	Control Node Magnet, Microwave Motion Sensor, Translucent	
105567	CN-REMOTE	Control Node Remote Control	
106318	NPP-300W	120-277V Network Power Pack 300W Max	
107788	NPPSL-PSW	Network Power Pack Pir Sensor, 12v, White	

### STOCKED KITS | 3ft - 11.5W

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID	PRODUCT DESCRIPTION
<b>3500K</b>			
105152	L11.5T8EX335DR1L11.5	PL9QELOKUSUJ	11.5W T8 3-FT LED (UL-C) 3500K (1 LAMP) EXTERNAL DRIVER
105078	L11.5T8EX335DR2L11.5	PLMBE7JYT1GG	11.5W T8 3-FT LED (UL-C) 3500K (2 LAMPS) EXTERNAL DRIVER
105155	L11.5T8EX335DR3L11.5	-	11.5W T8 3-FT LED (UL-C) 3500K (3 LAMPS) EXTERNAL DRIVER
105081	L11.5T8EX335DR4L11.5	-	11.5W T8 3-FT LED (UL-C) 3500K (4 LAMPS) EXTERNAL DRIVER
<b>4000K</b>			
105153	L11.5T8EX340DR1L11.5	PLKTGXN8R5B	11.5W T8 3-FT LED (UL-C) 4000K (1 LAMP) EXTERNAL DRIVER
105079	L11.5T8EX340DR2L11.5	PLKMWSAOXZMR	11.5W T8 3-FT LED (UL-C) 4000K (2 LAMPS) EXTERNAL DRIVER
105156	L11.5T8EX340DR3L11.5	-	11.5W T8 3-FT LED (UL-C) 4000K (3 LAMPS) EXTERNAL DRIVER
105082	L11.5T8EX340DR4L11.5	-	11.5W T8 3-FT LED (UL-C) 4000K (4 LAMPS) EXTERNAL DRIVER
<b>5000K</b>			
105154	L11.5T8EX350DR1L11.5	PLREKJP3VVPW	11.5W T8 3-FT LED (UL-C) 5000K (1 LAMP) EXTERNAL DRIVER
105080	L11.5T8EX350DR2L11.5	PLZEPSB9O7JS	11.5W T8 3-FT LED (UL-C) 5000K (2 LAMPS) EXTERNAL DRIVER
105157	L11.5T8EX350DR3L11.5	-	11.5W T8 3-FT LED (UL-C) 5000K (3 LAMPS) EXTERNAL DRIVER
105083	L11.5T8EX350DR4L11.5	-	11.5W T8 3-FT LED (UL-C) 5000K (4 LAMPS) EXTERNAL DRIVER

### Sensor

SENSOR	TECHNOLOGY	DIMMING	REMOTE CONTROL	QR CODE
CN-MGMST	Microwave for Motion Sensing	Bi-Level	CN-REMOTE	