

LED T8 EXTERNAL DRIVER 4FT 11.5W



PRODUCT DESCRIPTION:

MaxLite LED T8 with External Driver are the ideal energy saving choices when upgrading traditional linear T8 fluorescent lamps in fixtures containing standard G13 (medium bi-pin) sockets. **MaxLite lamps and drivers must be used together or UL is voided.**



FEATURES:

- Instant on
- Dimmable to 10%
- Mercury free and virtually no UV or IR light
- Suitable for open or enclosed fixtures
- Suitable for dry and damp locations

CONTROLS READY:

MaxLite's new Controls Ready (CR) fixtures allows for quick and easy in-field installation (plug and play) of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! See the accessory table for all controls options available for this fixture.

WARRANTY:

5-year standard warranty (further details available at www.maxlite.com/warranties) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

4FT 11.5W T8 TYPE C TUBE:

FAMILY	WATTAGE	LAMP TYPE	OPERATION	SIZE	CCT, LENS
L= LED	11.5= 11.5W	T8= T8 TUBE	EX= EXTERNAL DRIVER	4= 4-FT	35-CG-C = 3500K, Coated Glass 40-CG-C = 4000K, Coated Glass 50-CG-C = 5000K, Coated Glass

DRIVERS COMPATIBLE WITH 4FT 11.5W T8 TYPE C TUBE:

FAMILY	# OF LAMPS	Wattage
DDR = External Driver	2 = 1 or 2 lamps 4 = 3 or 4 lamps	L11.5IND-CR = for 11.5W Type C tube


STOCKED ITEMS

MODEL NUMBER	ORDER CODE
L11.5T8EX435-CG-C	14101933
L11.5T8EX440-CG-C	14101934
L11.5T8EX450-CG-C	14101935
DDR4L11.5IND-CR	105676

SPECIFICATIONS:

ITEM	SPECIFICATION	4 - FOOT - DETAILS
GENERAL PERFORMANCE	Power Consumption (bare lamp)	11.5W
	System Power	13W
	Lumens Delivered	1750-1800 lm
	Efficacy	135-138 lm/W
	CRI	≥80
	Beam Angle	210°±10%
	Color Temperature (CCT)	3500K, 4000K & 5000K
	Lumen Maintenance (L70)	50,000 Hours
ELECTRICAL	Power Factor	≥ 0.90
	Input Voltage	120V-277V, 50/60 Hz
PHYSICAL	Operating Temperature	4°F to 113°F (-20 to 45°C)
	Lens	Coated Glass
	Base	Medium Bi-Pin (G13)
CERTIFICATION	Certification	cETLus, FCC
	Material Usage	RoHS compliant; no mercury
	Environment	Damp location
	Warranty	5 Years

LINE DRAWING DIMENSION (G13LPNS)

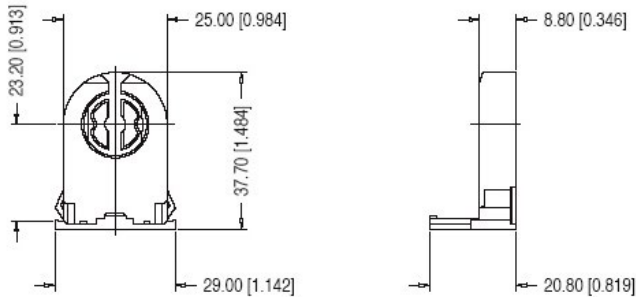

ACCESSORIES (SOLD SEPARATELY):

ORDER CODE	MODEL NUMBER	DESCRIPTION	ACCESSORIES IMAGE
73978	G13LPNS	G13 Low Profile Non-Shunted Lamp Holder	
103548	T8C-BBU	Battery Back Up for Type C Linears	
105891	CN-MGMST	Control Node Magnet, Microwave Motion Sensor, Translucent	
105567	CN-REMOTE	Control Node Remote Control	
106318	NPP-300W	120-277V Network Power Pack 300W Max	
107788	NPPSL-PSW	Network Power Pack Pir Sensor, 12v, White	

STOCKED KITS | 4ft - 11.5W

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID	PRODUCT DESCRIPTION
3500K			
105158	L11.5T8EX435DR1L11.5	PLS6O6WF65TL	11.5W T8 4-FT LED (UL-C) 3500K (1 LAMP) EXTERNAL DRIVER
105084	L11.5T8EX435DR2L11.5	PLNODNVWLJ9R	11.5W T8 4-FT LED (UL-C) 3500K (2 LAMPS) EXTERNAL DRIVER
105161	L11.5T8EX435DR3L11.5	PLIXH760NOGV	11.5W T8 4-FT LED (UL-C) 3500K (3 LAMPS) EXTERNAL DRIVER
105087	L11.5T8EX435DR4L11.5	PLSRFPY0XOXU	11.5W T8 4-FT LED (UL-C) 3500K (4 LAMPS) EXTERNAL DRIVER
4000K			
105159	L11.5T8EX440DR1L11.5	PLJSNIQ8XF03	11.5W T8 4-FT LED (UL-C) 4000K (1 LAMP) EXTERNAL DRIVER
105085	L11.5T8EX440DR2L11.5	PL6LYO0682JD	11.5W T8 4-FT LED (UL-C) 4000K (2 LAMPS) EXTERNAL DRIVER
105162	L11.5T8EX440DR3L11.5	PLUY9MLHY5CP	11.5W T8 4-FT LED (UL-C) 4000K (3 LAMPS) EXTERNAL DRIVER
105088	L11.5T8EX440DR4L11.5	PL8828N9DF32	11.5W T8 4-FT LED (UL-C) 4000K (4 LAMPS) EXTERNAL DRIVER
5000K			
105160	L11.5T8EX450DR1L11.5	PL554X7KCXN9	11.5W T8 4-FT LED (UL-C) 5000K (1 LAMP) EXTERNAL DRIVER
105086	L11.5T8EX450DR2L11.5	PLV5AWTGLZL0	11.5W T8 4-FT LED (UL-C) 5000K (2 LAMPS) EXTERNAL DRIVER
105163	L11.5T8EX450DR3L11.5	PLN3R6D251PP	11.5W T8 4-FT LED (UL-C) 5000K (3 LAMPS) EXTERNAL DRIVER
105089	L11.5T8EX450DR4L11.5	PLEP8L8BCK6Z	11.5W T8 4-FT LED (UL-C) 5000K (4 LAMPS) EXTERNAL DRIVER

Sensor

SENSOR	TECHNOLOGY	DIMMING	REMOTE CONTROL	QR CODE
CN-MGMST	Microwave for Motion Sensing	Bi-Level	CN-REMOTE	