


LED UTILITY WRAP

LSUECO Series



DIMENSIONS:

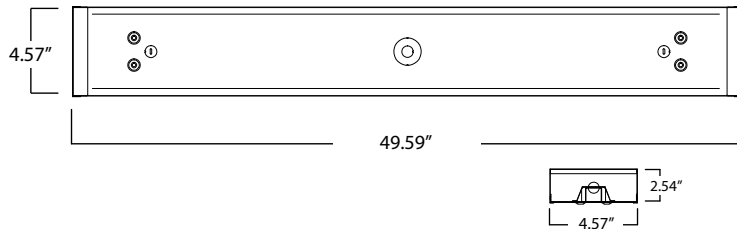

PRODUCT DESCRIPTION:

A cost effective LED Utility Wrap fixture, this product is constructed with a full length acrylic lens and one piece white fabricated steel body. It is designed to meet or exceed 7-8Fc at an 8' installation height. Product applications include utility lighting, parking garage lighting, and stairwell lighting.

FEATURES:

- Universal voltage: 120-277V
- Power factor >0.9
- CRI >80
- L70 lumen maintenance of 50,000 hours
- Operating temperature: -4°F to 113°F
- Suitable for Damp locations
- 0-10V dimming standard

WARRANTY:

10-year standard warranty with labor allowance* (see terms at www.maxlite.com/warranties)

*Warranty Limitations: Product must be rated for application per the Product Data Sheet (PDS); operated ≤16 hrs; in ambient temperatures -4°F to 77°F.

*Up to \$25/unit; registration required. Additional coverage may be available for purchase; contact MaxLite.

*Excludes EM/MS versions; component warranty applies.

*If ambient temperatures fall outside the -4°F to 77°F range, product is warranted for 5 years according to the operating temperature range specified on the PDS.

ORDERING:

ORDER CODE	MOD	DESCRIPTION
14099110	LSUECO-4DU4040	UTILITY WRAP ECO SERIES 4FT DIMMING 120-277V 40W 4000K

		LSUECO-4DU4040
ITEM	SPECIFICATION	DETAILS
GENERAL PERFORMANCE	Power Consumption (W)	41.4 W
	Lumens Delivered (lm)	4289
	Efficacy (lm/W)	104 lm/W
	CRI	≥80
	Color Temperature (K)	4000K
	L70 Lumen Maintenance (hours)	50,000
	Color Consistency	Proprietary binning for uniform color
	Dimensions	49.6"x4.6"x2.5"
ELECTRICAL	Power Factor	0.9
	Input Voltage	120-277V
	Dimming	0-10V
	Mounting	Surface Mounting
	Operating Temperature	-4°F to 113°F (-20°C to 45°C)
	Humidity	20-85% RH, non-condensing
CERTIFICATION	Certification	cLUus, FCC
	Material Usage	RoHS compliant; no mercury
	Environment	Indoor / Damp
	Warranty	10 year warranty*