


PROJECT NAME: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

 CAT. #: \_\_\_\_\_  
 FIXTURE SCHEDULE: \_\_\_\_\_

## Universal Downlight 8"

## High Lumen Wattage & CCT Selectable Downlight



### Product Description:

The Universal Commercial Downlight is an economical, all-in-one solution for adding recessed downlighting to hospitality, retail, office and other commercial lighting applications. It is both wattage and CCT selectable, allowing for easy, on-the-job customization. The downlight is designed with an integral whip which connects directly to a junction box (existing or independently mounted) and an integral driver that eliminates the need for a traditional recessed housing, saving installers time and money. Easy to install in new construction, remodel and retrofit projects, the downlight has a slim body that fits into shallow ceilings. Its white baffle trim blends seamlessly into interiors and reduces glare for soft, eye-pleasing illumination.

### Features:

- 32W/42W/52W Wattage selectable
- 3000K/3500K/4000K CCT selectable
- Beam angle 100°

### Dimming:

- 120-277V option available with 0-10V dimming (10%)

### Listings:

- cETLus for damp locations, Indoor
- ENERGY STAR certified

### Controls Ready:

Luminaire Level Lighting Control (LLC), individual addressability and/or grouping, ability to create scenes and high-Trim/ tuning sets is available and enabled on the product family with wireless Bluetooth technology via the field installable c-Max Network power pack and the optional occupancy PIR sensor.

### Stocked Item

ORDER CODE	MODEL NUMBER	ENERGY STAR ID #
108389	RCF832WCSDW	2389336

### Specifications:

	RCF832WCSDW		
	32W	42W	52W
Nominal Wattage (W)	32	42	52
Lumens (lm)	3200	4000	5000
Efficacy (lm/W)	100	100	95
BBU w/ EBUUP15030N300	1200 lm		
CRI	≥80		
CCT (K)	3000K, 3500K, 4000K		
L70 Lifetime (hrs)	50,000		
Voltage	120-277V 50/60Hz		
Power Factor	≥0.9		
Operating Temperature	-4°F to 104°F		
Listings	cETLus, FCC, Energy Star		
Environment	Suitable for Damp Locations		
Warranty	5 Years		


### Accessories (Sold separately)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
14098876	RCF-8	8" COMMERCIAL RECESSED FRAME, NEW CONSTRUCTION	
108663	RCF-XTRIM8	GOOF RING, DOWNLIGHT, 8" TO 10" COVERAGE. MAXIMUM CEILING CUTOUT 10-5/16"	
100298	EBUUP15007N0100	EMERGENCY BATTERY BACK UP, 15W, 100-347V, CEC COMPLIANT, FIELD INSTALLABLE	
106318	NPP-300W	120-277V NETWORK POWER PACK 300W MAX	
107788	NPPSL-PSW	NETWORK POWER PACK PIR SENSOR, 12V, WHITE	

### Dimmers:

BRAND	ITEM
LEVITON	IP710-LFZ, DS710
LUTRON	NTSTV-DV, NDTV, DDTV-WH
LEGRAND	H4FBL3PW

### Dimensions

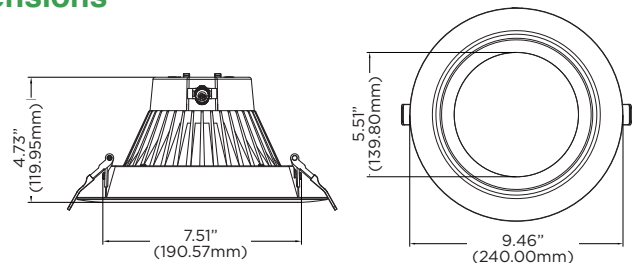

**5-year standard warranty** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties)) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.