
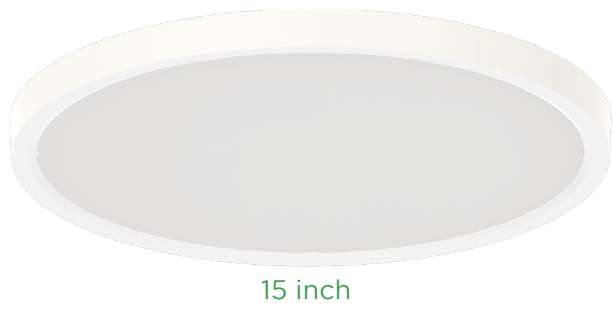


PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

Slim Flush Mount

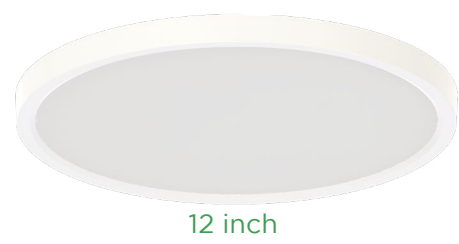

Product Description

Elevate your lighting experience with the Slim Flush Mount LED Fixture—designed for optimal performance in general lighting applications across hotels, motels, residential, and commercial spaces. This sleek, low-profile fixture delivers high-quality illumination with exceptional energy efficiency and long-lasting durability. Whether you're upgrading a room or outfitting an entire property, the Slim Flush Mount offers a modern aesthetic and reliable performance that meets the demands of contemporary environments.

Features

- Uniform illumination
- Integrated LED lighting
- ENERGY STAR qualified
- 2700K/3000K/3500K/4000K/5000K CCT Selectable (Default CCT: 3000K)
- 90 CRI
- Meets California Title 24 energy standards
- Can be ceiling or wall mounted
- Dimming: TRIAC: 100 -10%
- UL rated for wet locations



Model Selection

FAMILY	SIZE	TECHNOLOGY	WATTAGE	CRI	FINISH	CCT SELECTABLE
SFM = Slim Flush Mount	5.5 = 5.5"	LA = LED Integrated	10 = 10W	9= 90 CRI	WH = White BK = Black	CS = CCT Selectable: 2700K/3000K/3500K/4000K/5000K
	7 = 7.0"		14 = 14W			
	9 = 9.5"		18 = 18W			
	12 = 12.0"		22 = 22W			
	15 = 15.0"		28 = 28W			



Slim Flush Mount

Stocked Items

ITEM NUMBER	ORDER CODE	DESCRIPTION	ENERGY STAR ID
SFM5.5LA109BKCS	113459	SLIM FLUSH MOUNT, 5.5 INCH, 10W, 120V, TRIAC DIMMING, 90 CRI, BLACK FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4512538
SFM5.5LA109WHCS	113460	SLIM FLUSH MOUNT, 5.5 INCH, 10W, 120V, TRIAC DIMMING, 90 CRI, WHITE FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4511264
SFM7LA149BKCS	113461	SLIM FLUSH MOUNT, 7 INCH, 14W, 120V, TRIAC DIMMING, 90 CRI, BLACK FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4512539
SFM7LA149WHCS	113462	SLIM FLUSH MOUNT, 7 INCH, 14W, 120V, TRIAC DIMMING, 90 CRI, WHITE FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4511265
SFM9LA189BKCS	113463	SLIM FLUSH MOUNT, 9 INCH, 18W, 120V, TRIAC DIMMING, 90 CRI, BLACK FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4512540
SFM9LA189WHCS	113464	SLIM FLUSH MOUNT, 9 INCH, 18W, 120V, TRIAC DIMMING, 90 CRI, WHITE FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	4511266
SFM12LA229BKCS	113465	SLIM FLUSH MOUNT, 12 INCH, 22W, 120V, TRIAC DIMMING, 90 CRI, BLACK FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	N/A
SFM12LA229WHCS	113466	SLIM FLUSH MOUNT, 12 INCH, 22W, 120V, TRIAC DIMMING, 90 CRI, WHITE FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	N/A
SFM15LA289BKCS	113467	SLIM FLUSH MOUNT, 15 INCH, 28W, 120V, TRIAC DIMMING, 90 CRI, BLACK FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	N/A
SFM15LA289WHCS	113468	SLIM FLUSH MOUNT, 15 INCH, 28W, 120V, TRIAC DIMMING, 90 CRI, WHITE FINISH, CCT SELECTABLE 2700/3000/3500/4000/5000K	N/A

Specifications

	SFM5.5LA1090xx	SFM7LA1490xx	SFM9LA1890xx	SFM12LA12290xx	SFM15LA2890xx
Size (Diameter)	5.5"	7.0"	9.0"	12.0"	15.0"
Input Wattage (W)	10W	14W	18W	22W	28W
Lumens Delivered (lm)	820 lm	1,150 lm	1,480 lm	1,650 lm	2,000 lm
Nominal Efficacy (lm/W)	82 lm/W	82 lm/W	82 lm/W	75 lm/W	71 lm/W
CRI	>90				
Color Temperature (K)	Selectable - 2700K/ 3000K/ 3500K/ 4000K/ 5000K (Default CCT: 3000K)				
Beam Angle (deg)	110°				
Calculated L70 Lumen Maintenance	50,000 hours				
Dimming Technology	10%-100%				
Power Factor	>0.9				
Input Voltage	120V				
Operating Temperature	-4°F to 122°F (-20°C to 40°C)				
Lens	PMMA - Poly (methyl methacrylate)				
Certifications	UL Listed, ENERGY STAR, Title 24 JA8 Compliant, FCC			UL Listed, Title 24 JA8 Compliant, FCC	
Environment	Indoor, Wet Location				
Warranty	5 Year warranty. Check maxlite.com/warranties for details.				

Compatible Dimmers



BRAND	SERIES	DIMMER MODELS	BRAND	SERIES	DIMMER MODELS	BRAND	SERIES	DIMMER MODELS
LUTRON	Diva C-L	DVCL-153P	LUTRON	Skylark C-L	SCL-153P	LEVITON	Sureslide	NO.6674
LUTRON	Diva C-L	DVWCL-153PH-WH	LUTRON	Skylark	CTCL-153PDH-WH	LEVITON	SureSlide	NO.6672
LUTRON	Maestro C-L	MACL-153M	LUTRON	Toggler	TGCL-153PH-WH	LEVITON	Illumena Tech	R50-IPL06-10M





Slim Flush Mount

Dimensions



5.5 inch

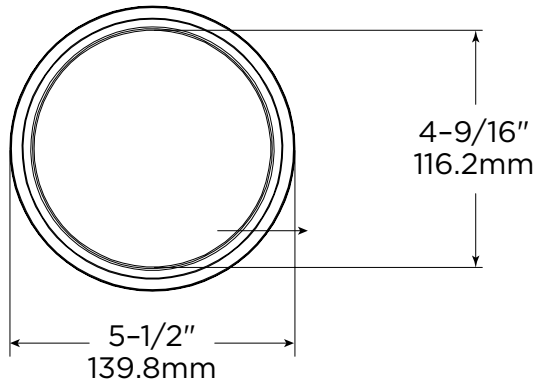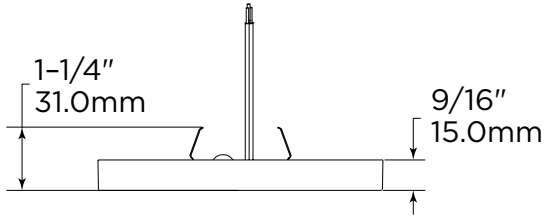

7.0 inch

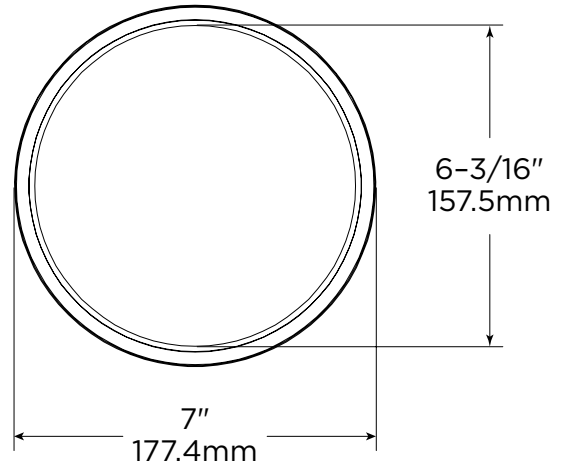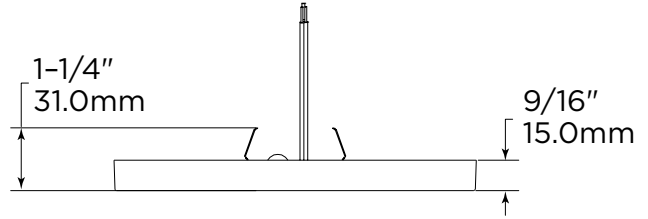

9.0 inch

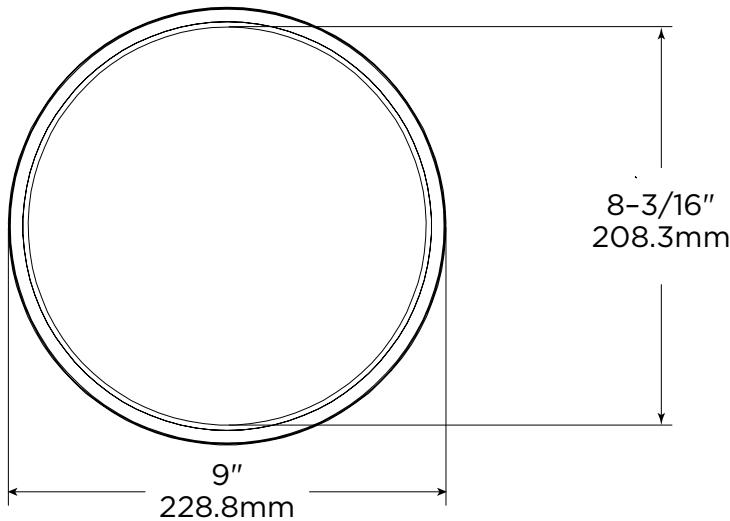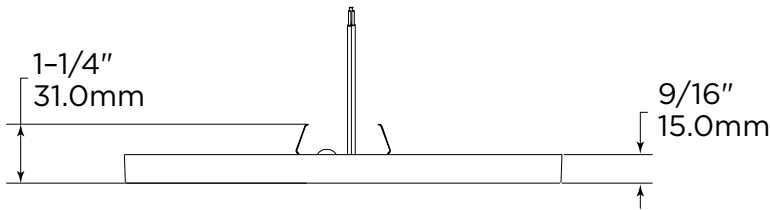




Slim Flush Mount

Dimensions

12.0 inch

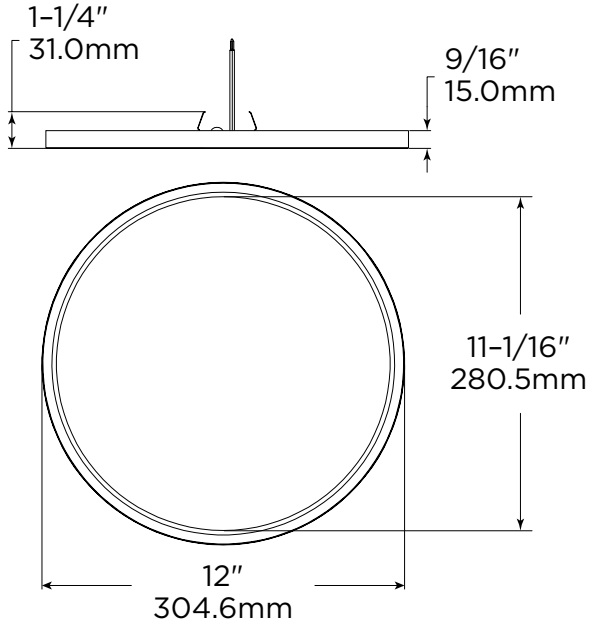

15.0 inch

