

**T5C- BBU**  
**BBU SERIES**



**PRODUCT DESCRIPTION:**

Optimized for use with MaxLite UL Type-C Linear T5/T8 tubes, the LED emergency driver with battery backup assures 90 minutes of light output in the absence of power. UL listed and suitable for retrofit installations, the emergency driver wires between the driver supplied in the MaxLite retrofit kit and the LED tube to enable reliable lighting during emergencies. The external rechargeable lithium battery protects against overcharging, over-discharging and short circuit for long-term, reliable performance.



**FEATURES:**

- External lithium battery
- Battery protections: over charge protection; over discharge protection, short circuit protection


**WARRANTY:**

1-year standard warranty (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties)).

**SPECIFICATIONS**

SPECIFICATIONS		T5C-BBU
		DETAILS
Input Voltage		120-277VAC
Frequency		50/60Hz
Power Factor		>0.6 @full Load
Input Current		100mA
Standby power		< 2w
White/Black lead		Switch
Operating Temperature		-20°C to 80°C
Warranty		1 Years

**PRODUCT DIMENSIONS:**

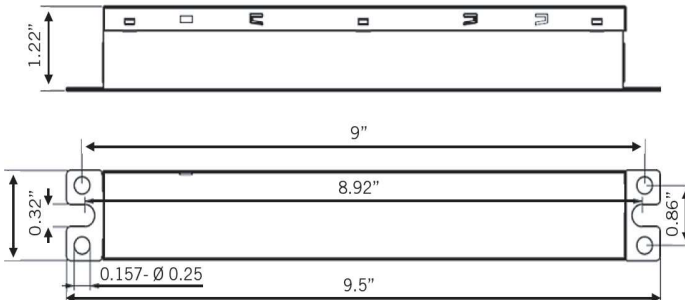

**WIRING DIAGRAM:**

