

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

Vapor Tight Wattage & CCT Selectable VE Value Series



Product Description:

A cost-effective vapor tight fixture with tremendous flexibility, the VE Series is both wattage and CCT selectable and provides an emergency battery backup option. This durable, IP65 rated linear fixture with stainless steel clips is ideal for commercial and industrial environments where water, humidity, and dust may occur, including stairwells, parking garages, utility areas and agricultural applications.

Features:

- CCT and Wattage selectable (9 possible combinations with each fixture)
- 0-10V dimming standard
- CRI: ≥ 80
- Universal voltage 120-277V
- L70 lumen maintenance of 50,000 hours
- Default setting for WCS models is set to lower wattage and 4000K
- UL Listed - Suitable for wet locations

Ordering Information

FAMILY	SIZE	VOLTAGE	WATTAGE SELECT**	CCT SELECT**	BATTERY BACKUP OPTIONS*
VE= Linear Vapor Tight - Value Series	4= 48" 8= 96"	U= 120-277V	23W= 23/35/47W 65W= 60/70/85W	CS= Color Selectable (3500K/4000K/5000K)	[BLANK]= None EM= Emergency Back-up

*EM unit is UL924 classified

**Default setting for WCS models is set to lowest wattage and 4000K

Stocked Items

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID #	DLC CLASSIFICATION	DLC PRIMARY USE DESIGNATION
111226	VE-4U23WCS	S-6ZDVTQ	DLC Standard	Direct Linear Ambient Luminaires
		S-4TP6RL		Low-Bay Luminaires for Commercial and Industrial Buildings
111228	VE-4U23WCSEM	S-6ZDVTQ		Direct Linear Ambient Luminaires
		S-4TP6RL		Low-Bay Luminaires for Commercial and Industrial Buildings
111227	VE-8U65WCS	S-479C4Y		Direct Linear Ambient Luminaires
		S-S1XYLK		Low-Bay Luminaires for Commercial and Industrial Buildings
111229	VE-8U65WCSEM	S-479C4Y		Direct Linear Ambient Luminaires
		S-S1XYLK		Low-Bay Luminaires for Commercial and Industrial Buildings

Accessories (Sold Separately)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
74139	MLCHKLSV15	CABLE KIT 15' LOOP X TOGGLE	



5-year standard warranty with labor allowance (further details available at www.maxlite.com/warranties)

Vapor Tight Wattage & CCT Selectable

VE Value Series

Specifications

	VE-4U23WCS		
Size	4 ft.		
Nominal Wattage (W)*	23W	35W	47W
Lumens Delivered (lm)***	3,200 lm	4700 lm	6240 lm
Nominal Efficacy (lm/W)***	150 lm/W		
Lumens Delivered at BBU mode (lm)**	1100 lm - for 90 minutes, when fully charged		
Color Temperature (K)*	3500K, 4000K, 5000K		
CRI	≥80		
Calculated L70 Lumen Maintenance	≥50,000 hours		
Dimming Technology	0-10V		
Dimming Range	10-100%		
Input Voltage	120-277V AC		
Power Factor	≥0.9		
Housing	Polycarbonate		
Diffuser	Polycarbonate Lens		
Product Weight	4.2 lbs		
Humidity	10-80% RH, non-condensing		
Operating Temperature	-4°F to 104°F (-20°C to 40°C), except for EM models. EM models: 50°F to 104°F (10°C to 40°C)		
Certifications	cULus listed, FCC, Rohs Complaint. IP65		
Qualifications	DLC Standard		
Environment	Wet Locations		
Warranty	5 Years warranty. Check maxlite.com/warranties for details		

*Fixtures are set to lowest wattage and 4000K as default factory setting

**Lumens delivered at BBU mode varies based on wattage and CCT setting

*** Lumens and efficacy listed on the Spec table is based on 4000K CCT

Vapor Tight Wattage & CCT Selectable


VE Value Series

Specifications


	VE-8U65WCS		
Size	8 ft.		
Nominal Wattage (W)*	60W	70W	85W
Lumens Delivered (lm)	8,800 lm	10,000 lm	11,700 lm
Nominal Efficacy (lm/W)	155 lm/W		
Lumens Delivered at BBU mode (lm)**	2300 lm - for 90 minutes, when fully charged		
Color Temperature (K)*	3500K, 4000K, 5000K		
CRI	≥80		
Calculated L70 Lumen Maintenance	≥50,000 hours		
Dimming Technology	0-10V		
Dimming Range	10-100%		
Input Voltage	120-277V AC		
Power Factor	≥0.9		
Housing	Polycarbonate		
Diffuser	Polycarbonate Lens		
Product Weight	8.3 lbs		
Humidity	10-80% RH, non-condensing		
Operating Temperature	-4°F to 104°F (-20°C to 40°C), except for EM models. EM models: 41°F to 104°F (5°C to 40°C)		
Certifications	cULus listed, FCC, Rohs Compliant. IP65		
Qualifications	DLC Standard		
Environment	Wet Locations		
Warranty	5 Years warranty. Check maxlite.com/warranties for details		

*Fixtures are set to lowest wattage and 4000K as default factory setting
 **Lumens delivered at BBU mode varies based on wattage and CCT setting


Dimensions

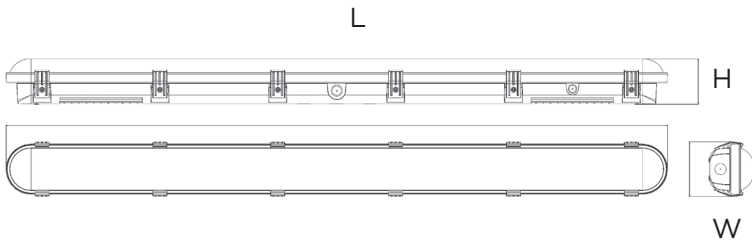

Mounting Hole Dimensions for 4ft



Mounting Hole Dimensions for 8ft



PRODUCT	A (L)	B (W)	C (H)	LI	L2	L3
VE-4U23WCS	47.3"	3.8"	3.2"	1.04"	33.7"	N/A
VE-8U65WCS	94.1"	3.8"	3.2"	1.04"	33.7"	4.72"

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.