MaxLite®

PROJECT NAME:_____ CAT. #: _____

NOTES:_____ FIXTURE SCHEDULE:_____

WallMax Full Cutoff Wall Pack

15-28W MODELS

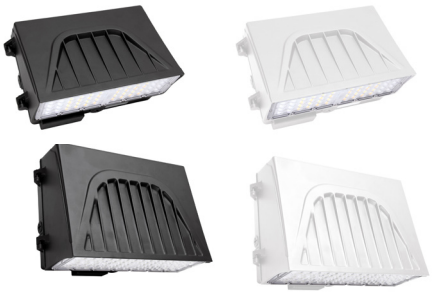

BLACK & WHITE FINISH OPTIONS

40-100W MODELS

CCT SWITCH

PHOTOCELL

Product Description:

WallMax Cutoff Wall Packs are a full cutoff architectural wall mounted fixture ideal for commercial offices, schools and other public administrative buildings. It offers a wide range of options including CCT and wattage selectability, integral photocell and c-Max controls ready port.

Features:

- CCT selectable between 3000K, 4000K or 5000K
- Wattage Selectable versions
- Sealed housing - control nodes are mounted internally without impacting the fixture sealing or aesthetics
- 4 x 1/2" conduit holes, one on each side for surface conduit applications

Controls Options:

- Integral photocell with on/off switch included standard
- Controls Ready for field installable c-Max controls

Construction:

- Die Cast Aluminum housing with UV stabilized and vandal resistant polycarbonate LED lens

Listings:

- UL listed for Wet Locations, Outdoor
- IP65

Ordering Structure

FAMILY	WATTAGE	VOLTAGE	DISTRIBUTION	CCT	FINISH	CONTROLS	EM OPTIONS	OPTIONS
WPC= WallMax Cutoff	**15=** 15W	**U=** 120-277V	**T4=** Type IV**	**CS=** 3/4/5K Selectable**	**B=** Dark Bronze	**PCCR=** Photocell (On/Off) Switch & Controls Ready (Standard)	**BLANK=** None	**BLANK=** None
	20= 10/16/20W	**H=** 277-480V*	**BLANK=** Type IV	**WCS=** 3/4/5K Selectable & Wattage Selectable	**L=** Black		**E0=** Battery Backup 0°C**	**S=** 20kA Surge Protector****
	28= 15/20/28W				**W=** White		**E2=** Battery Backup -20°C***	**TA=** TAA Compliant****
	40= 20/30/40W							
	70= 50/59/70W							
	100= 84/90/100W							

**Available only with 100W wattage, use wattage settings and control nodes for lower wattage settings*
*** Available only with 15W fixed wattage*
**** E2 not available with 100 Watt*
***** Not available with 15W fixed wattage*
For 59W, select the 59W setting on the 70W model.

DLC Listings

MODEL NUMBER	ORDER CODE	DLC ID #
WPC15UT4-CSBPCCR	108415	P1GOLZE3
WPC16U-CSBPCCR	112566	S-G9TDYZ
WPC20U-WCSBPCCR	112567	S-4363L6

MODEL NUMBER	ORDER CODE	DLC ID #
WPC28U-WCSBPCCR	112568	S-4363L6
WPC40U-WCSBPCCR	112569	S-HG50P7
WPC59U-CSBPCCR	113075	S-F801YV

MODEL NUMBER	ORDER CODE	DLC ID #
WPC70U-WCSBPCCR	112570	S-WMHQX7
WPC84U-CSBPCCR	113199	S-XLRL2C
WPC100U-WCSBPCCR	112571	S-N84X10

© 2026 Specifications subject to change without notice.

MaxLite®

WallMax Full Cutoff Wall Pack

Accessories

MODEL #	ORDER CODE	DESCRIPTION	IMAGE
CN-RTMST*	105564	C-MAX RECTANGULAR MOTION SENSOR/PC, REQUIRES REMOTE CONTROL TO PROGRAM	
CN-REMOTE	105567	C-MAX REMOTE CONTROL, AT LEAST ONE REQUIRED PER PROJECT TO PROGRAM MOTION SENSOR	
CEA-RDB	107785	C-MAX EXTERNAL ADAPTER ROUND, BRONZE	
CEA-RDW	106903	C-MAX EXTERNAL ADAPTER ROUND, WHITE	
NN-RDB	105897	C-MAX NETWORK CONTROL NODE ROUND, BRONZE	
NN-RDW	106391	C-MAX NETWORK CONTROL NODE ROUND, WHITE	
NN-RDMPBXR	111459	NETWORK NODE ROUND, PIR MOTION SENSOR, PHOTOCELL, BRONZE	
NN-RDMPW	109924	NETWORK NODE ROUND, PIR MOTION SENSOR,PHOTOCELL, WHITE	
EM2-REMOTE-MT	111294	FIELD INSTALLABLE REMOTE MOUNT - 20°C BATTERY BACKUP (FOR UNIVERSAL (120-277V) PRODUCTS ONLY)	

*Recommend using fixture PC instead of PC function in c-Max.

Specifications

	WPC15	WPC20*	WPC28*	WPC40*	WPC70*	WPC100*
Nominal Wattage (W)	15W	10/16/**20W**	15/20/**28W**	20/30/**40W**	50/59/**70W**	84/90/**100W**
Output (lm)	2,140-2,340	3,010-3,240	4,000-4,200	5,960-6,360	9,640-10,990	13,080-14,500
Efficacy (lm/W)	133-149	139-157	137-150	146-163	142-157	130-145
CCT	Selectable between 3000/4000/5000K					
CRI	≥80					
L70 Lifetime (hrs)	>100,000					
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V	120-277V (277-480V available, 84/90/100W)
Power Factor	≥0.9					
Dimming	0-10V and high-end trim (with c-Max Controls)					
Surge Protection	6kV					
Controls	C-Max Compatible Standard (CR), integral photocell with on/off switch					
Battery Backup	120V or 277V only, 800-900 lumens, 1fc minimum in 10'x10' grid at 10-11' mounting height, 0°C 16W, -20°C 14W. During EM mode the product will operate at 5000K only.					
Operating Temperature	-40°F to 122°F (-40°C to 50°C)					
Certification	cULus, DLC Premium, FCC and RoHS Compliant					
Construction	Die Cast Aluminum housing with corrosion resistant polyester paint and UV stabilized impact resistant polycarbonate lens					
Environment	Outdoor Wet Location and IP65					
Warranty	10 Year warranty. Check maxlite.com/warranties for details.					

*Wattage Selectable versions, bold indicates default setting. See Lumen Chart below for lumens at other settings.

WallMax Full Cutoff Lumen chart

WATTAGE*	3000K	4000K/5000K
10W (20W)	1,390	1,570
15W (28W)	2,050	2,250
16W (20W)	2,220	2,510

WATTAGE*	3000K	4000K/5000K
30W (40W)	4,380	4,890
50W (70W)	7,100	7,850
59W (70W)	8,370	9,260

WATTAGE*	3000K	4000K/5000K
84W (100W)	10,920	12,180
90W (100W)	11,700	13,050

*Number in parenthesis is highest (default) setting for wattage selectable versions.

© 2026 Specifications subject to change without notice.

WallMax Full Cutoff Wall Pack

Dimensions

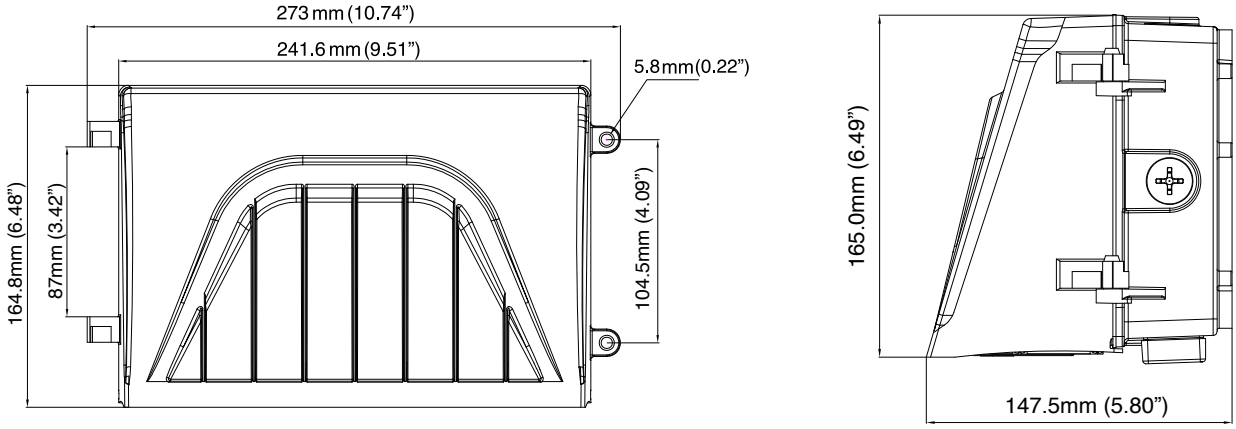

15-28W MODELS

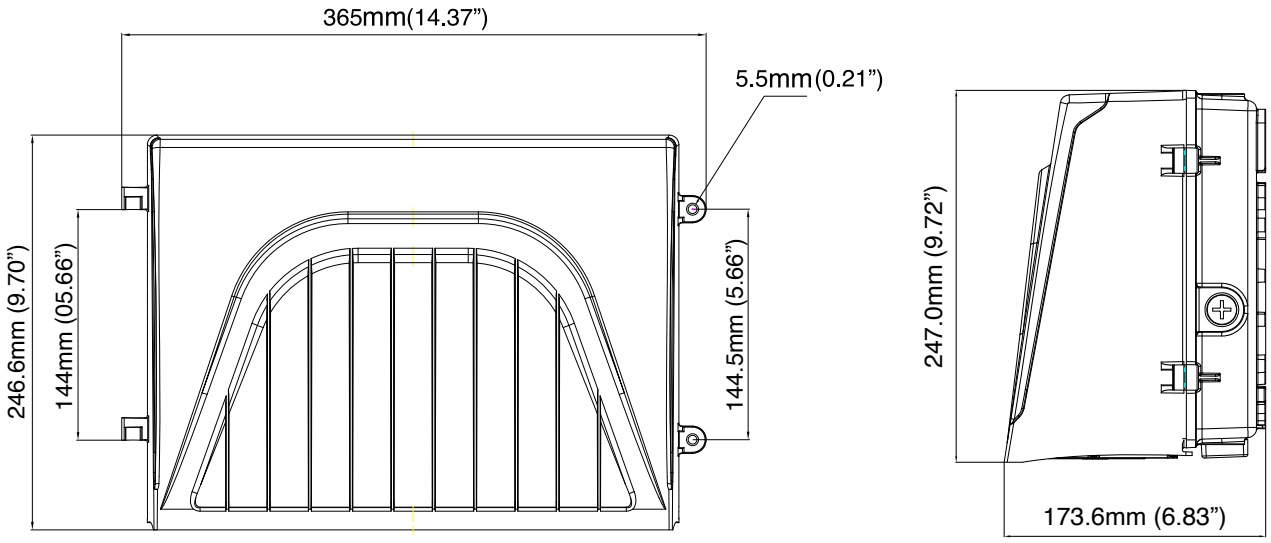

40-100W MODELS

© 2026 Specifications subject to change without notice.