


**LED ADJUSTABLE RECESSED  
RETROFIT DOWNLIGHT**  
RRA6 SERIES



RRA610XXW Model

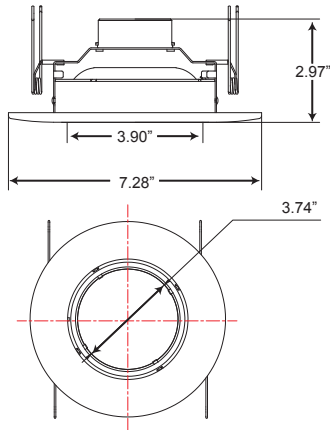

**PRODUCT DESCRIPTION:**

MaxLite's Adjustable LED Recessed Downlight Retrofit is a versatile light source for most five and six-inch recessed downlight fixtures. Compatible with 120V systems, the 10W LED retrofit delivers 875 lumens with excellent uniformity and color rendering, in color temperatures ranging from warm to cool white.

**FEATURES:**

- Installs into most 5" & 6" recessed cans
- 120V power supply
- E26 base adapter
- Impact-resistant plastic lens
- White finish standard
- 5 year warranty
- Dims to 7% or lower when used with recommended controls (see Compatible Dimmers chart)
- Vertical Adjustment - 30 degrees
- Rotates 355 degrees
- 90 degree beam angle
- Suitable for damp locations

**MODEL SELECTION** (Full list of order codes on pg. 2)

Typical order example: RRA61027W

| RRA   | 610                        |  | W               |
|---|----------------------------|--|-----------------|
| FAMILY  | SIZE AND WATTAGE (NOMINAL) | CCT  | COLOR           |
| <b>RRA=</b> Downlight Retrofit Adjustable Downlight | <b>610=</b> 6", 10 Watts   | <b>27=</b> 2700K<br><b>30=</b> 3000K<br><b>41=</b> 4100K | <b>W=</b> White |

**COMPATIBLE DIMMERS:**

| MAKE   | DIMMER MODEL |
|--------|--------------|
| Lutron | SCL 153P     |
| Lutron | DVCL 153P    |
| Lutron | TGCL 153P    |
| Lutron | CTCL 153P    |
| Lutron | AYLV 600P    |

| MAKE    | DIMMER MODEL |
|---------|--------------|
| Leviton | Decora 6672  |
| Leviton | IPL06        |

**SPECIFICATIONS:**

| ITEM                       | SPECIFICATION         | RRA61027W                             | RRA61030W | RRA61041W |
|----------------------------|-----------------------|---------------------------------------|-----------|-----------|
|                            |                       | DETAILS                               |           |           |
| <b>GENERAL PERFORMANCE</b> | Power Consumption (W) | 10                                    | 10        | 10        |
|                            | Lumens Delivered (lm) | 875                                   | 875       | 875       |
|                            | Efficacy (lm/W)       | 88                                    | 88        | 88        |
|                            | CRI                   | 80                                    | 80        | 80        |
|                            | Color Temperature     | 2700K                                 | 3000K     | 4100K     |
|                            | L70 Lifetime (hours)  | 35,000                                |           |           |
| <b>ELECTRICAL</b>          | Power Factor          | 0.9                                   |           |           |
|                            | Input Voltage         | 120V                                  |           |           |
| <b>PHYSICAL</b>            | Operating Temperature | -4°F to 113°F                         |           |           |
| <b>CERTIFICATION</b>       | Certification         | cULus, FCC, LM-79, LM-80, Energy Star |           |           |
|                            | Material Usage        | RoHS compliant; no mercury            |           |           |
|                            | Environment           | Indoor and Damp                       |           |           |
|                            | Warranty              | 5 Years                               |           |           |

**ORDERING\*:**

| ORDER CODE | MODEL     | CCT   | WATTAGE | VOLTAGE | FINISH |
|------------|-----------|-------|---------|---------|--------|
| 74767      | RRA61027W | 2700K | 10      | 120     | White  |
| 74967      | RRA61030W | 3000K |         |         |        |
| 74968      | RRA61041W | 4100K |         |         |        |

\*Please contact your MaxLite representative to order products that don't have order codes listed here.