

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

Emergency Battery Backup

EBU Series



Product Description:

The EBUUP15007N0100 unit is listed for factory and field installation and designed to work with various MaxLite fixtures. It is suitable for use in residential, commercial or industrial applications.

Features:


- Input wattage: 7W
- Input Voltage: 100-347AC, 50/60Hz
- AC Input Current: 100mA max
- AC Input Power Rating: 7.0W max
- Emergency Time: 90 Minutes
- Output Voltage: 50-150VDC
- Battery Charging Current: 250mA
- Recharge Time: 24 Hours
- Operating Temperature: 32°F to 122°F
- Includes a test switch and the charge indicator kit, no cover

Listings:

- UL924, Listed for factory or field installation
- CEC Compliant

Warranty:

5-year standard warranty*
 (further details available at www.maxlite.com/warranties)
 *Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

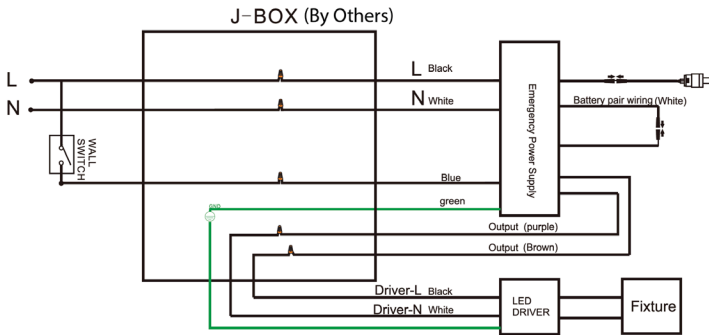


Specification

ORDER CODE: 100298 / PART NUMBER: EBUUP15007N0100

OUTPUT POWER	7W	20W	25W	30W
Battery Li-ion Battery	14.8V/2000mAh	14.8V/2500mAh	14.8V/3000mAh	29.6V/2000mAh

Dimensions

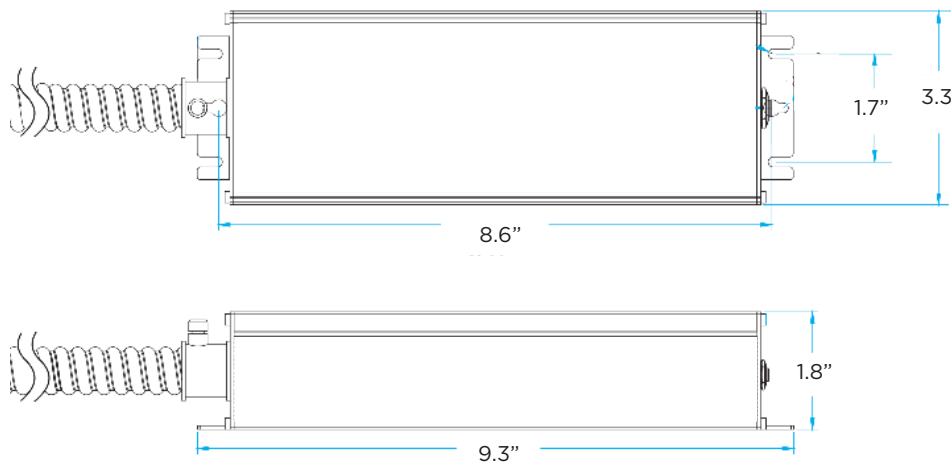

5-year standard warranty (further details available at www.maxlite.com/warranties) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.