

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

120-277V, 6A RELAY WITH 12V POWER PACK



PPA-06A Overview:

The PPA-06A allows any non-MaxLite controls ready luminaires to be controlled with c-Max control apps when using with BLE sensors, controllers or switches. This allows for an affordable installation of network controls solution to meet energy codes. It also provide 12V auxiliary power to power sensors. It has a 6A relay built in to provide high voltage switching through 0-10V low voltage dimming inputs.

Features:

- Class 2 device with ½” threaded nipple to attach to standard electrical enclosures
- Built in 12V auxiliary power with 200mA to power multiple sensors
- Connect a max load of 6A at 120 -277V
- When paired with BLE sensors (e.g CNSL-PSW)
 - Individual addressability or group control
 - Ability to create scenes for more customized dimming
 - Ability to set High-trim
- 5 Year warranty

Applications:

Ideal for retrofit applications with existing 0-10V LED luminaires:

- Office
- Warehouse/Industrial
- Hospitality/Retail
- Schools/University

Ordering Information

MODEL NUMBER	ORDER CODE
PPA-06A	110750

Specifications

	PPA-06A
OPERATING VOLTAGE	120-277V
MAXIMUM LOAD	6A, 720W@120V, 1662W@277V, for LED driver only
LOAD SWITCHING	Zero-cross Hybrid Switching
CONTROL OUTPUT	0-10V
SINKING CURRENT	10mA
AUX POWER OUTPUT	12Vdc 200mA
SAFETY	UL Listed E511069 Light-emitting-diode Controllers
OPERATING TEMPERATURE	-22°F to 149°F / -30°C to 65°C
OVERALL DIMENSIONS	3.22" x 1.71" x 1.25"
COLOR	White
WEIGHT	2.75oz





5-year standard warranty (further details available at www.maxlite.com/warranties)

120-277V, 6A RELAY WITH 12V POWER PACK


Product Dimensions

PPA-06A

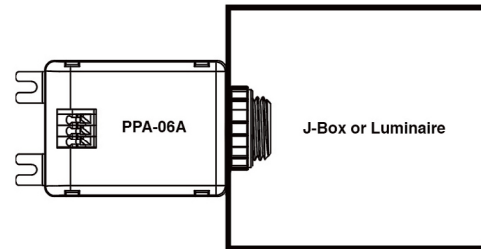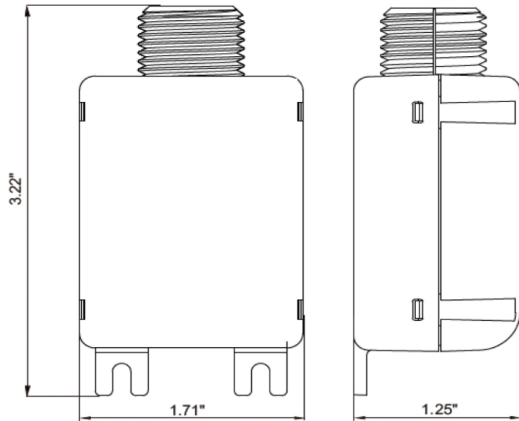

Wiring Diagram

WIRING DIAGRAM WITH PPA-06A

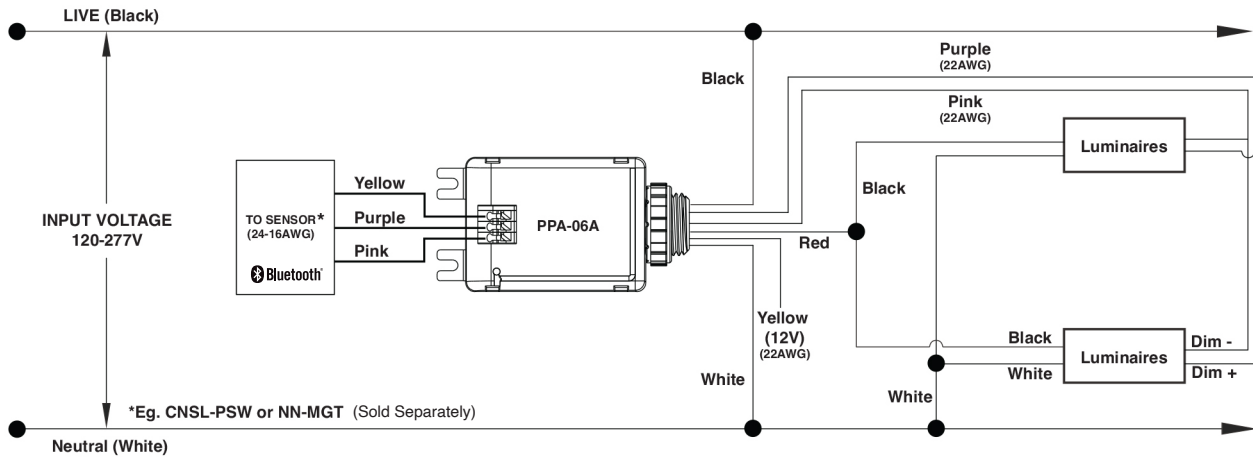

Commissioning

c-Max mobile App makes it easy to pair devices, create groups, set scenes/schedules, customize dimming levels, and adjust high trim based on application needs.

Visit www.maxlite.com/cmaw for How-to-Videos and a comprehensive commissioning guide.

